OPTIMUM AIRCRAFT WEAPONS SELECTION AND SEQUENTIAL FIRING STRATEGY FOR TARGETS OF OPPORTUNITY

JOHN NICHOLAS DONIS
and
THOMAS MORRIS BURNS

LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIF. 93940

OPTIMUM AIRCRAFT WEAPONS SELECTION AND SEQUENTIAL FIRING STRATEGY FOR TARGETS OF OPPORTUNITY

by

John Nicholas Donis
Lieutenant, United States Navy
A. B., University of Pennsylvania, 1958

and

Thomas Morris Burns
Lieutenant, United States Navy
B. S., Pennsylvania State University, 1959

Submitted in partial fulfillment
for the degree of

MASTER OF SCIENCE IN OPERATIONS RESEARCH

from the

UNITED STATES NAVAL POSTGRADUATE SCHOOL
May 1966

ABSTRACT

A pilot engaged in a strike mission against targets of opportunity is continually confronted with the decision as to how many and which of his available weapons should be expended against a variety of targets which are encountered. Associated with this decision problem is the problem of determining an optimal load for such a mission subject to the constraints of available payload and number of weapons stations on the aircraft. Certain assumptions are made concerning the distribution of targets within the target area which lead to a dynamic programming formulation of the decision problem. This yields a system of ordinary differential equations which are solvable recursively. In addition to the dynamic programming model, a sub-optimum determination of a "best load" is discussed. Although not as complete or precise as the dynamic programming method, this formulation is more readily adaptable to squadron level decision making.

TABLE OF CONTENTS

Section		Page
1.	Introduction	9
	Assumptions in the Models	10
	Method of Solution	11
2.	General Discussion and Development of the Models	13
	Dynamic Programming Model	13
	A Sub-Optimal Determination of Load	20
3.	Sample Results	31
	Optimal Load and Firing Strategy Determination	31
	Comparison of Expected Returns from Non-Optimal Firing Strategies	39
	Sensitivity of Expected Returns to Target Values	41
4.	Conclusions and Recommendations	45
	Acknowledgements	48
	Bibliography	49
	Appendix I	50
	Appendix II	52
	Appendix III	64

LIST OF TABLES

Table		Page
1.	Composition of Possible Loads	27
2.	Kill Probabilities	27
3.	Kill Probabilities	31
4.	Loadings and Expected Returns, Dynamic Programming Method	32
5.	Possible Loads and Expected Returns, Sub-Optimal Method	33
6.	Best Loads and Expected Returns	38
7.	Gains in Expected Value of Targets Killed Achieved by Utilizing the Optimal Firing Strategy	40
8.	Percentage Decrease in Expected Returns Due to Misestimation of V_r^*.	44
9.	Sample of "BESTLD" Output	58
10.	Sample of "POLICY" Output	63
11.	Values of f_{ijs}.	64

LIST OF ILLUSTRATIONS

Figure		Page
1.	Optimal Strategy Display	39

1. INTRODUCTION

The problem of selecting weapons for an aircraft strike mission and using those weapons effectively has been documented quite extensively. However, present publications are devoted almost exclusively to the situation where the target is assumed known prior to the mission and the aircraft can be loaded for that target, or where several different aircraft can be loaded differently to cover an unknown spectrum of targets.[1] These approaches are inadequate for determining weapons requirements against targets of opportunity. A pilot engaged in such a mission is confronted with the decision as to which and how many of his available weapons to expend when any target is encountered. When various types of targets might be encountered, each with a different strategic or tactical value, he wishes to maximize the value of the targets he can expect to destroy. Associated with this is the problem involving the choice of weapons that should be initially loaded onto the aircraft for such a mission. Here the problem is constrained by maximum payload, weapons, and weapons stations availability. It is desired to obtain, within these constraints, (1) the optimum feasible weapons mix to be loaded for use against an uncertain spectrum of targets, and (2) a doctrine for the expenditure of these weapons when targets are encountered.

The model developed herein attacks these problems in reverse order. First, an optimum firing doctrine is generated for all feasible loads. Then that load which yields the maximum expected return,

---

[1] NAVWEPS Report 8664, "Preferred Aircraft Loadings Based on the Predicted Combat Effectiveness of Conventional Air-to-Surface Weapons," NOTS TP 3710, 1965, (SECRET).

when expended in accordance with the optimum doctrine, becomes the optimal load.

ASSUMPTIONS IN THE MODELS

Certain assumptions, necessary to the model development are made concerning target distributions within the target area and tactics of the strike aircraft.

It is assumed that there are a finite number of different target types, each randomly and independently distributed within the target area with known density. For example, from photo-reconnaissance or other sources it might be known that the density of trucks within the target area is x per square mile. The number of targets of each type is assumed to be large enough so that the probability of future encounters is unchanged by consideration of the number already met. Further, these targets are assumed to be of a unitary nature, characterized by the existence of single shot kill probabilities, as distinguished from area targets characterized by probabilities of destroying a certain percentage of the area or value of the target.

The assumption is made that a ratio scale of target values can be specified. For example, with the least valuable target as a base with value V, the achievement of a kill on a target type i is worth 7V, target type j is worth 8V, etc.

For defensive reasons the strike aircraft is restricted to a single attack on any target which might be encountered. The pilot may not drop a bomb on the target, assess damage, and then make another attack if a kill has not been achieved. He may however, expend any number of weapons on this single pass provided they are all

the same type. That is, while he may expend three 500 lb. bombs, he may not drop one 500 lb. bomb and one 1,000 lb. bomb. This restriction is not necessary to the development of the models, but rather recognizes that differences in aim points between different weapons make this mixed drop undesirable.

METHOD OF SOLUTION

Using data on weapons weights, constraints of aircraft payload capacity, and the number of available weapons stations on the plane, all feasible loadings can be enumerated. Initial loads are then considered which are not subsets of some other feasible load. That is, if five weapons of type one and three weapons of type two constitute a feasible load, then four weapons of type one and three of type two is also feasible but a subset of the former. The kill potential of some subset of a feasible load is clearly less than that of the original load and is therefore not considered in the determination of an optimal initial loading.

A functional equation for the expected value of targets killed is then set up as a dynamic programming process yielding a value for kill potential for each of the feasible loads being considered. The maximum kill potential from amongst these loadings determines the optimal load for the strike aircraft. Additionally in the solution of this dynamic programming process, the optimal firing strategy for the pilot is obtained for any initial load. The optimized sequential decision process yields a policy which determines as a function of the operating time and weapons remaining, the best weapons to be expended in an encounter with any of the various target types.

Dynamic programming provides a complete and very precise means of determining the optimum load for a "targets of opportunity" type mission. Except in the very simplest cases however, the problem is quite complex and will require a computer for solution. In the majority of operational situations such equipment will not be available. Thus an approximate method, suitable for hand calculation, is needed for determining the initial load.

In order to achieve simplicity, this "hand model" must sacrifice detail and thus completeness. In this respect it is a sub-optimal method. The simplified method is best suited for comparing a few, rather than all, feasible loads for use against a selected target list. By choosing the best weapon for each target type and comparing the expected returns for various mixes of these weapons, a "best load" can be generated.

2. GENERAL DISCUSSION AND DEVELOPMENT OF THE MODELS

The random distribution of targets leads to an exponential inter-encounter time distribution for the strike aircraft searching the target area.[1] (All targets which are within the visibility range of the aircraft's track are assumed sighted. Alternatively the sightings could be reduced by some degradation factor which takes into account the difficulty associated with perceiving a given target type. This however would not alter the analysis which follows.) The mean rate of sightings (the reciprocal of the mean of the exponential distribution of inter-encounter times) is denoted by r.

DYNAMIC PROGRAMMING MODEL

The development of the dynamic programming formulation of the problem is best seen by first considering the simpler cases. To begin with, a model has previously been developed for the allocation of weapons over a limited time interval.[2] This can be utilized for generating the optimal firing strategy in the simplest case of one target type-one weapon type. The optimal loading problem is not pertinent; for a single weapon type the best load is clearly the maximum number that can be carried on the aircraft. First define:

$f_n(t)$ = expected number of targets killed in the time interval $(0,t)$ if there are n weapons at time $t = 0$ and these are utilized optimally.

---

[1] Appendix I

[2] Bram, J., "Allocation of Weapons to Targets with Exponential Arrival Times in a Limited Time Interval," OEG Interim Research Memorandum 32, 1963.

An initial loading of N weapons and a time T allowable for search is assumed, and $f_n(t)$ will be calculated for $0 \leq n \leq N$ and $0 \leq t \leq T$. Define:

p_j = probability that j weapons expended against a target will achieve a kill.

Clearly $f_n(t)$ is dependent on the p_j's and on r, the encounter rate.

By Bellman's "principle of optimality,"[1] for $0 \leq t_1 \leq t$, the optimal policy in the interval (0, t), given n weapons at time t = 0, must also be optimal in the subinterval (t_1, t) given $n - n_1$ weapons at time $t = t_1$, where n_1 weapons were expended in the first subinterval $(0, t_1)$.

Let $t_1 = \Delta t \ll T$. By definition of the exponential arrival process, the probability of an encounter in a small interval of time Δt is proportional to Δt with constant of proportionality r, the encounter rate. Thus the probability of one encounter in the time interval $(0, \Delta t)$ is $r\Delta t$ and no encounters occur with probability $1 - r\Delta t$.

Breaking the time interval (0, t) into the two sub-intervals $(0, \Delta t)$ and $(\Delta t, t)$ yields:

$(1 - r\Delta t)$ = the probability that no encounters will occur in the first sub-interval.

p_j = the expected return in the first sub-interval having expended j weapons.

---

[1] Bellman, R., Dynamic Programming, (Princeton, New Jersey: Princeton University Press, 1957), p. 83.

$f_n(t - \Delta t)$ = the expected return in the second sub-interval having expended no weapons in the first and following an optimal strategy in $(\Delta t, t)$.

$f_{n-j}(t - \Delta t)$ = expected return in the second time interval having expended j of the n weapons in the first sub-interval and behaving optimally in $(\Delta t, t)$.

The expected return over the whole interval (0, t) is then:

$$(1 - r\Delta t)\, f_n(t - \Delta t) + r\Delta t\, (p_j + f_{n-j}(t - \Delta t))$$

To optimize over the period (0, t), j must be chosen such that this expression is a maximum. Therefore

$$(1) \qquad f_n(t) = (1 - r\Delta t)\, f_n(t - \Delta t) + r\Delta t \max_{1 \le j \le n} (p_j + f_{n-j}(t - \Delta t))$$

The maximization here is over the range $1 \le j \le n$ rather than $0 \le j \le n$ since it clearly would never pay to let a target go by without firing any weapons, saving them all for future encounters which are not certain to occur.

Rearranging (1), dividing by Δt and taking the limit as Δt approaches zero yields:

$$(2) \qquad f_n'(t) = - r f_n(t) + r \max_{1 \le j \le n} (p_j + f_{n-j}(t))$$

From (2), $f_n(t)$ can be calculated for all n and t recursively as follows: By definition, $f_0(t) = 0$ for all t. (The expected return is zero over any period of time if there are no weapons with which to operate.) Also $f_n(0) = 0$ for all n. (The expected return is zero if there is no time in which to operate.) Solving (2) for

n = 1 yields:

$$f_1(t) = p_1 (1 - e^{-rt})$$

Note that this result was to be expected. Exponential inter-encounter times lead to a Poisson counting process for the number of encounters within a time interval. The term $(1 - e^{-rt})$, is simply the probability of at least one encounter in the time interval (0, t), and p_1 is the probability that, given an encounter, a kill will be achieved with the expenditure of the single weapon.

Utilizing $f_1(t)$ equation (2) can now be solved for n = 2.

$$f_2'(t) = - rf_2(t) + r \max (p_1(2 - e^{-rt}), p_2)$$

Since $p_2 > p_1(2 - e^{-rt})$ when either $t < \frac{1}{r} \ln \frac{p_1}{2p_1 - p_2}$ or if $p_2 > 2p_1$, the solution to the differential equation is:

$$f_2(t) = p_2 (1 - e^{-rt}) \quad \text{for } t \leq \frac{1}{r} \ln \frac{p_1}{2p_1 - p_2} \text{ or if } p_2 \geq 2p_1$$

$$f_2(t) = 2p_1 - e^{-rt} (rp_1 t + p_1 + p_2 - p_1 \ln \frac{p_1}{2p_1 - p_2})$$

$$\text{for } t \geq \frac{1}{r} \ln \frac{p_1}{2p_1 - p_2} \text{ and } p_2 < 2p_1$$

The significance in this solution lies in the "cross-over" point in time. If the search time remaining is less than this value of t, the optimal return is achieved by dropping both bombs on the next target which is encountered. If greater, only one bomb is dropped on the target, the other being saved for possible future encounters.

Having found $f_2(t)$, $f_3(t)$ can now be calculated. The differential equation however becomes unduly complicated for $n > 2$. A numerical solution may be obtained for the problem though by recourse to equation (1), the difference equation, with which $f_n(t)$ can be calculated for any n to any desired degree of accuracy by taking Δt small enough.

With the possibility of encounters with targets of different types, the value of a target which is met must be considered when the decision is made as to how many weapons should be expended.

The methods used in developing the functional equation are analagous to those for the simpler model with the addition of considerations of target value and different kill probabilities. Define:

m = the number of different target types.

p_{ij} = the probability that j weapons expended on a target type i will achieve a kill.

r_i = average encounter rate with type i targets.

v_i = value of target type i.

$f_n(t)$ = expected value of targets killed in the interval (0, t) given n bombs at time t = 0 and optimal utilization of these weapons.

Then:

$$(3) \quad f_n(t) = (1 - \sum_{i=1}^{m} r_i \Delta t)\, f_n(t - \Delta t) + \sum_{i=1}^{m} r_i \Delta t \max_{0 \le j \le n} (v_i p_{ij} + f_{n-j}(t-\Delta t))$$

Note that in this case the maximization is over the range $0 \le j \le n$ vice $1 \le j \le n$. Here the expected return might be greater if no weapons are dropped on targets of little value, expecting at some later time in the mission to meet something of greater worth.

The differential equation is obtained by subtraction of $f_n(t)$ from both sides of the above equation, division by Δt and taking the limit as Δt approaches zero.

$$f'_n(t) = -\sum_{i=1}^{m} r_i f_n(t) + \sum_{i=1}^{m} r_i \max_{0\le j\le n} (v_i p_{ij} + f_{n-j}(t))$$

For n = 1 and m = 2 the solution to this equation can be shown to be:

$$f_1(t) = \frac{(r_1 p_1 v_1 + r_2 p_2 v_2)}{(r_1 + r_2)} (1 - e^{-(r_1 + r_2)t}) \text{ for } p_2 v_2 > p_1 v_1$$

and $$0 \le t \le \frac{1}{r_1 + r_2} \ln \frac{(r_1 p_1 v_1 + r_2 p_2 v_2)}{r_2 (p_2 v_2 - p_1 v_1)}$$

or if $p_1 v_1 > p_2 v_2$ then for

$$0 \le t \le \frac{1}{r_1 + r_2} \ln \frac{(r_1 p_1 v_1 + r_2 p_2 v_2)}{r_1 (p_1 v_1 - p_2 v_2)}$$

or if $p_1 v_1 = p_2 v_2$ then for all t.

$$f_1(t) = p_1 v_1 + (p_2 v_2 - p_1 v_1) \left[\frac{r_1 p_1 v_1 + r_2 p_2 v_2}{r_1 (p_1 v_1 - p_2 v_2)} \right]^{\frac{r_1}{r_1 + r_2}} e^{-r_1 t}$$

for $p_1 v_1 > p_2 v_2$ and $t \ge \frac{1}{r_1 + r_2} \ln \frac{r_1 p_1 v_1 + r_2 p_2 v_2}{r_1 (p_1 v_1 - p_2 v_2)}$

$$f_1(t) = p_2 v_2 + (p_1 v_1 - p_2 v_2) \left[\frac{r_1 p_1 v_1 + r_2 p_2 v_2}{r_2 (p_2 v_2 - p_1 v_1)} \right]^{\frac{r_1}{r_1 + r_2}} e^{-r_2 t}$$

for $p_2 v_2 > p_1 v_1$ and $t \ge \frac{1}{r_1 + r_2} \ln \frac{r_1 p_1 v_1 + r_2 p_2 v_2}{r_2 (p_2 v_2 - p_1 v_1)}$

Thus for the simple case of two target types and a single weapon, the expected returns can be calculated analytically. In addition, the optimal strategy is found, here consisting merely of a cross-over time, the time before which it does not pay to fire the weapon at the target with the lowest $p_i v_i$. For $n > 1$ however, it can readily be seen that solutions to the differential equation are not so easily obtained. Again though, through recourse to the difference equation, (3), numerical solutions can be obtained for any n to any desired degree of accuracy.

Further generalization of the model entails a relaxation of the restriction to a single weapon type. The functional equation is similar to those for the simpler models with some minor changes in the definitions of the terms. Define:

p_{ijk} = the probability that k weapons of type j expended on a target of type i will achieve a kill.

L = the number of different weapon types.

$f_{n_1 n_2 n_3 \cdots n_L}(t)$ = expected value of targets killed in the interval $(0, t)$, given n_i weapons of type i (for $i=1,\cdots,L$) at $t = 0$ and optimal utilization of these weapons.

The difference equation can be written:

$$f_{n_1 n_2 n_3 \cdots n_L}(t) = \left(1 - \sum_{i=1}^{m} r_i \Delta t\right) f_{n_1 n_2 n_3 \cdots n_L}(t - \Delta t)$$

$$+ \sum_{i=1}^{m} r_i \Delta t \max_{1 \le j \le L} \max_{0 \le k \le n_j} \left(v_i p_{ijk} + f_{n_1 n_2 \cdots n_j - k \cdots n_L}(t - \Delta t)\right)$$

The differential equation can be written as before, but the solutions are obtainable only in the most trivial cases.

A FORTRAN program has been written however from which numerical solutions to the difference equation can be calculated.[1] With inputs of the aircraft load carrying capabilities, the mission time, and the parameters of the model (m, r_i, v_i, L, p_{ijk}, and Δt) the program selects values for the n_i which are consistent with the limitations of the aircraft and maximize f. Additionally, another FORTRAN program[1] lists the optimal strategy to be employed in the decisions relating to the expenditure of these weapons.

A SUB-OPTIMAL DETERMINATION OF LOAD

In the majority of practical cases hand calculation will be the only means available for determining loading requirements. In such cases a sub-optimal method can be used at the squadron level for obtaining the initial weapons load for a mission. Define:

T = search time (i.e., mission time allotted to searching for and attacking targets).

$p_{ni}(T)$ = probability that target type i will be met n times during the mission.

$\Pi_i(T) = \sum_{n=1}^{\infty} p_{ni}(T)$ = probability that target type i will be met at least once during the mission.

v_i = value of target type i.

m = number of target types.

b_{js} = number of sticks[1] of s weapons of type j in the load.

L = number of weapon types available.

[1] In this development the terms stick and salvo are used equivalently. The choice of a stick or a salvo, in the load determination, will depend upon which gives the higher kill probability.

k_{iws} = probability that a stick of s type w weapons will kill target type i.

Note that in this development individual bombs are considered as a stick of one; i.e., two 250 lb. bombs might be considered as two sticks of one type j or one stick of two type j weapons.

If, a priori, only the more highly valued targets and those individual weapons with the highest kill probabilities against these targets are considered,[1] the assumption can be made that a target sighted will be dropped on, as long as the appropriate weapon for that target is available. (Note that this assumption is used only for determining the load. In the actual performance of the mission there is the possibility that, if that weapon most effective against a target is not available, a less effective weapon will be dropped.) The problem then becomes one of maximizing, for a given mission time, the expected value of targets killed, E, for those loads being considered. E may be determined as follows:

$$E = \sum_{i=1}^{m} f_{ijs}\, k_{ijs}\, v_i$$

where f_{ijs} is the expected number of type i targets on which weapon type j can be expended, and j indicates that weapon type for which $k_{ijl} \geq k_{iwl}$ for all w = 1, 2, ···, L.

If the number of type j weapons available were limitless, f_{ijs} would simply be equal to $\bar{n} = \sum_{n=o}^{\infty} np_{ni}(T)$. However, since a given load is limited to b_{js} sticks of type j weapon, no more than b_{js} can be dropped regardless of how many type i targets are sighted. Thus

[1] The decision as to which targets and weapons will be considered will depend highly upon the judgement of the individual responsible for determining the aircraft load.

f_{ijs} is given by

$$(4) \qquad f_{ijs} = \sum_{n=o}^{b_{js}-1} np_{ni}(T) + \sum_{n=b_{js}}^{\infty} b_{js} p_{ni}(T)$$

Equation (1) can be reduced to a more easily calculable form.

Since $\sum_{n=o}^{b_{js}-1} np_{ni}(T) = \sum_{n=1}^{b_{js}-1} np_{ni}(T)$ and $\sum_{n=b_{js}}^{\infty} p_{ni}(T) = \Pi_i - \sum_{n=1}^{b_{js}-1} p_{ni}(T)$,

equation (4) can be written as

$$f_{ijs} = \sum_{n=1}^{b_{js}-1} np_{ni}(T) + b_{js}\Pi_i - b_{js} \sum_{n=1}^{b_{js}-1} p_{ni}(T)$$

$$= b_{js}\Pi_i - \sum_{n=1}^{b_{js}-1} (b_{js}-n)\, p_{ni}(T)$$

but $\Pi_i = 1 - p_{0i}(T)$ and consequently $b_{js}\Pi_i = b_{js} - b_{js}p_{0i}(T)$. Note that $b_{js}p_{0i}$ can be expressed as $(b_{js} - 0)\, p_{0i}$. Thus equation (4) now reduces to

$$(5) \qquad f_{ijs} = b_{js} - \sum_{n=o}^{b_{js}-1} (b_{js}-n)\, p_{ni}(T)$$

Equations (4) and (5) are valid for all $b_{js} \geq 1$. By definition $f_{ijs} = 0$ for $b_{js} = 0$, since no sticks of type j weapon can be dropped if none are carried.

As noted before, the random distribution of targets and consequent exponential inter-encounter times lead to a Poisson counting

process in determining the probabilities of encountering given numbers of targets; i.e., for type i targets appearing at a mean rate r_i,

$$p_{ni}(T) = e^{-r_i T} \frac{(r_i T)^n}{n!} .$$

This gives

$$f_{ijs} = b_{js} - \sum_{n=o}^{b_{js}-1} (b_{js}-n)\, e^{-r_i T} \frac{(r_i T)^n}{n!} \qquad (6)$$

Table 11, Appendix III gives values of f_{ijs} for various combinations of b_{js} and $r_i T$. This table greatly facilitates calculation of a "best load" from the feasible loads being considered.

To determine the "best load" for a given set of targets, find that individual weapon type j, for each target, which has the highest kill probability. The loads considered are then the different mixes of these weapons selected from a list of feasible loads for the aircraft.

For a given load, b_{js} will be known for each type weapon in the load and the encounter rate r_i will be estimated for each of the critical targets. The planned search time T will also be known for the mission. Thus using known values of k_{ijs} and estimated values of v_i, E can be calculated.

Consider first the case where weapons will be dropped individually (sticks of one only) and where each weapon type in the load will be used against only one type target. In other words, target types and weapon types are matched one to one. Since weapons are to be dropped singly, $b_{js} = b_{j1}$ for each weapon type j. To determine E for such a load, first determine b_{j1} and $r_i T$ for each weapon-target type combination. Then obtain f_{ijs} from Table 11, and multiply this

value by $k_{ijs} v_i$. Let $f_{ijs} k_{ijs} v_i = E_{ij}$. Add the resulting E_{ij}'s to get E for the load, i.e., $E = \sum_{i=1}^{m} E_{ij}$. (Note that the E_{ij}'s are summed over i only, since the subscript j simply indicates that weapon which is most effective against target type i.) In the same manner, E may be determined for each load being considered; that load which yields the maximum E is then the "best load."

For this sub-optimal model, the extension of the problem to include sticks of two or more weapons is accomplished quite easily, since different size salvos or sticks of a given type weapon constitute different loads. For example, as noted previously, two 250 lb. bombs might be considered as a load consisting of two sticks of one bomb or as another load consisting of one stick of two bombs. With this in mind, E can be calculated for these loads in the same manner as previously outlined. In order to keep the problem hand workable, this approach assumes that each delivery of a given type weapon will consist of the same size stick. This assumption is made solely for determination of the aircraft loading prior to flying the mission. During the actual mission, however, it is quite likely that sticks of different sizes will be expended at different times. For example, a pilot might drop one type j bomb on the first truck he sees, a stick of three type j bombs on the second truck he sees, etc. Prior to the mission, however, this load of four type i weapons could have been evaluated as one stick of four, two sticks of two, or possibly as four sticks of one, since calculations for sticks of varying sizes quickly exceed the bounds of practical hand workability.

In addition to the case where targets and weapons are matched one to one, consideration must be given to the case where a given weapon type is optimal for more than one target type. If the assumption that a target sighted will be dropped on were adhered to, the expected number of type i targets killed would be proportional to the encounter rate r_i. However, in this situation, a concession is made to the fact that, early in the mission, a target of lesser value might be passed in hopes of encountering a more highly valued target later. Thus it is assumed that the expected number of type i targets killed is proportional to both the encounter rate, r_i, and the target value, v_i. The expected return from a given load is now calculated exactly as before with the following minor modification: For all targets type i against which weapon type j is most effective, calculate the E_{ij}'s exactly as in the simpler case (as if all type j weapons were to be expended on each type target). Then to approximate the particular expected value of type y targets killed by weapon type j, E_{yj} is multiplied by the normalizing factor $N_y = \frac{r_y v_y}{\Sigma r_i v_i}$ where the summation in the denominator is taken over those type i targets for which weapon type j is optimal. These expected values are then added to give E as before.

A logical extension to this hand approximation is the consideration of "secondary" weapons. A secondary weapon would be considered to be a weapon which has high kill probabilities against several targets, yet is optimal against none of them. There are certainly cases where such a weapon might give higher expected returns over the entire target spectrum than would a load consisting of only those weapons which are optimal for the individual targets. For example,

consider a case in which there are two targets and three weapons to be used against these targets. The single stick kill probabilities for the individual weapons are as follows:

WEAPON	TARGET 1	TARGET 2
1	.09	.01
2	.01	.09
3	.08	.08

If the load were limited to those weapons which are optimal for individual targets, only weapons 1 and 2 would be considered. However, it is obvious that weapon 3 merits examination, and, in fact, it appears as if a pure load of weapon type 3 might possibly be the best load to use in this particular case. Calculation of E for such a secondary weapon is identical to that in the foregoing case in which one weapon is considered for use against more than one target.

This sub-optimal development may, at first glance, appear to be long and cumbersome. It must be realized though that in most actual situations all but a very few feasible loads will be eliminated from consideration prior to any calculation, and these will be examined only as far as they pertain to a small number of critical target types (normally not more than three or four). Thus it can be seen that relatively few calculations will actually be required and these will be of a trivial nature.

In order to clarify the use of the sub-optimal model, the following simple example is presented in detail.

Consider an armed reconnaissance mission with a planned search time of one hour. (Thus T = 1 so that $r_i T = r_i$ for all targets).

Three target types are considered:

$v_1 = 2$ $\quad$ $r_1 = 5$

$v_2 = 1$ $\quad$ $r_2 = 3$

$v_3 = 4$ $\quad$ $r_3 = 2$

The aircraft has two weapon stations and two types of weapons are considered, one more effective against target type 1, the other more effective against types 2 and 3 (see Table 2).

The possible loads are indicated in Table 1.

	WEAPON			
	1		2	
Load	Single	Stick of 2	Single	Stick of 2
A	1		1	
B	2			
C			2	
D		1		
E				1

TABLE 1
COMPOSITION OF POSSIBLE LOADS

j	s \ i	1	2	3
1	1	.02	.03	.01
	2	.06	.08	.03
2	1	.01	.05	.02
	2	.03	.12	.05

TABLE 2
KILL PROBABILITIES

Load A: $b_{11} = 1$, $b_{21} = 1$

Target 1 - Weapon 1

$f_{111} = .99326$ (from Table 11; $b_{js} = 1$, $r_i T = 5$)

$E_{11} = f_{111} k_{111} v_1 = (.99326)\ (.02)\ (2) = .0397$

Target 2 - Weapon 2

$f_{221} = .95021$ ($b_{js} = 1$, $r_i T = 3$)

$E_{22} = f_{221} k_{221} v_2 = (.95021)\ (.05)\ (1) = .0475$

Target 3 - Weapon 2

$f_{321} = .86466$ ($b_{js} = 1$, $r_i T = 2$

$E_{32} = f_{321} k_{321} v_3 = (.86466)\ (.02)\ (4) = .0692$

Since weapon type 2 is optimal for two target types, E_{22} and E_{32} must be normalized.

$N_2 E_{22} = (r_2 v_2 / r_2 v_2 + r_3 v_3)\ E_{22} = (3/11)\ (.0475) = .0129$

$N_3 E_{32} = (8/11)\ (.0692) = .0608$

Thus for load A, E = .0397 + .0129 + .0608 = <u>.1134</u>

Load B: $b_{11} = 2$

$f_{111} = 1.95283$ ($b_{js} = 2$, $r_i T = 5$)

$E_{11} = E$ (Load B) = (1.95283) (.02) (2) = <u>.0724</u>

Load C: $b_{21} = 2$

$f_{221} = 1.75106$ ($b_{js} = 2$, $r_i T = 3$)

N_2E_{21} = (3/11) (1.75106) (.05) (1) = .0240

f_{321} = 1.45866 (b_{js} = 2, r_iT = 2)

N_3E_{32} = (8/11) (1.45866) (.02) (4) = .0846

E(Load C) = .0240 + .0846 = .1086

Load D: b_{12} = 1 (Note that this is almost the same as Load B, but now the two weapons are considered as one stick of two vice two sticks of one).

f_{112} = .99326

E_{11} = E(Load D) = (.99326) (.06) (2) = .1192

Load E: b_{22} = 1

f_{222} = .95021

N_2E_{22} = (3/11) (.95021) (.12) (1) = .0312

f_{322} = .86466

N_3E_{22} = (8/11) (.86466) (.05) (4) = .1252

E (Load E) = .0312 + .1252 = .1564

For the loads considered, the maximum E is .1564. Therefore the "best load" is load E which consists of one stick of two type 2 weapons. Note that if sticks of one only (case 1 in the model development) had been considered, the "best load" would have been load A with one of each type weapon yielding E = .1134.

The foregoing sub-optimal method is limited in that it considers search time as a whole rather than a time-stepped firing doctrine as

in the dynamic programming method. Thus those added values which might be generated by strategies which vary with mission time are lost in this formulation. Consequently the expected kill values will generally be much lower than those of the dynamic program formulation, and the "best load" generated will not always be the optimum load. However, the load obtained by this method should, if expended in accordance with the optimum firing doctrine of the dynamic program, be one of the more highly valued loads.

3. SAMPLE RESULTS

OPTIMAL LOAD AND FIRING STRATEGY DETERMINATION

For a mission time of 15 minutes, seven weapons from which to choose, and values of the other input parameters as listed in Table 3, an optimal loading has been determined using the "BESTLD" program of Appendix II, with the following inputs:

Weapon Type : 1 2 3 4 5 6 7

Weapon Weight: 265 300 510 600 675 950 1975

Number of racks = 5

Max payload = 5,000 lbs.

Number of target types = 4

Mission time = 0.25 hours

Delta T = .010 hours (This is the Δt of equation (3)).

TARGET TYPE	ENCOUNTER RATE	VALUE
1	30.00000	1.00
2	1.60000	25.00
3	.10000	60.00
4	3.00000	5.00

		KILL PROBABILITIES				
NUMBER OF WEAPONS =		1	2	3	4	5
TARGET 1	WEAPON 1	.020	.040	.060	.070	.080
TARGET 1	WEAPON 2	.030	.040	.060	.070	.080
TARGET 1	WEAPON 3	.040	.070	.090	.100	.110
TARGET 1	WEAPON 4	.005	.008	.010	.011	.012
TARGET 1	WEAPON 5	.030	.050	.070	.071	.080
TARGET 1	WEAPON 6	.050	.050	.100	.120	.130
TARGET 1	WEAPON 7	.120	.160	.180	.200	.202
TARGET 2	WEAPON 1	.010	.020	.024	.030	.035
TARGET 2	WEAPON 2	.020	.030	.040	.050	.060
TARGET 2	WEAPON 3	.012	.021	.030	.036	.042
TARGET 2	WEAPON 4	.016	.032	.047	.061	.076
TARGET 2	WEAPON 5	.022	.039	.053	.065	.075
TARGET 2	WEAPON 6	.007	.012	.016	.019	.021
TARGET 2	WEAPON 7	.050	.150	.153	.200	.240
TARGET 3	WEAPON 1	.050	.080	.140	.170	.190
TARGET 3	WEAPON 2	.094	.143	.172	.196	.205
TARGET 3	WEAPON 3	.060	.090	.150	.190	.220
TARGET 3	WEAPON 4	.036	.070	.102	.131	.161
TARGET 3	WEAPON 5	.119	.175	.220	.233	.245
TARGET 3	WEAPON 6	.070	.100	.160	.200	.230
TARGET 3	WEAPON 7	.080	.120	.180	.220	.250
TARGET 4	WEAPON 1	.011	.020	.028	.035	.042
TARGET 4	WEAPON 2	.019	.036	.048	.056	.064
TARGET 4	WEAPON 3	.019	.032	.042	.051	.057
TARGET 4	WEAPON 4	.001	.001	.001	.001	.002
TARGET 4	WEAPON 5	.052	.054	.064	.082	.090
TARGET 4	WEAPON 6	.009	.016	.023	.028	.033
TARGET 4	WEAPON 7	.029	.057	.066	.080	.090

TABLE 3
KILL PROBABILITIES

These weapons' weights and aircraft payload and rack capacities result in approximately 400 possible loadings which must be considered. From amongst these 400, Table 4 lists the five loads with the greatest expected returns and for comparison the loading yielding the least. A loading designated 1200002 denotes one weapon of type one, two weapons of type two, zero weapons of types three through six, and two weapons of type seven.

LOAD NO.	LOADING	EXPECTED RETURN
1	0300002	1.29514
2	1200002	1.25048
3	0100102	1.22353
4	1000102	1.20670
5	3000002	1.20409
381	2011010	.38069

TABLE 4
LOADINGS AND EXPECTED RETURNS,
DYNAMIC PROGRAMMING METHOD

The expected returns from the optimal load are over three times higher than those of the worst. In fact the twentieth best load, 0020300, had expected returns of only .77700. Thus the optimal loading yields returns more than 65% better than a loading which is better than 95% of the possible loads.

The above inputs and constraints have also been used in the sub-optimal model to generate a "best load." Weapon 7 is the best single weapon against targets 1 and 2, and weapon 5 is best against targets 3 and 4. Thus the only loads considered in this formulation were 0000500, 0000401, and 0000102. Table 5 lists six possible load considerations (including stick options) and the expected returns from each.

Loading	E
0000102 (Weapon 7 used as a stick of 2)	.5766
0000401 (Weapon 5 used as a stick of 4)	.4458
0000102 (Weapon 7 used as 2 sticks of 1)	.3824
0000500 (Weapon 5 used as a stick of 5)	.3740
0000401 (Weapon 5 used as 4 sticks of 1)	.3320
0000500 (Weapon 5 used as 5 sticks of 1)	.1432

TABLE 5
POSSIBLE LOADS AND EXPECTED
RETURNS, SUB-OPTIMAL METHOD

The "best load" using the sub-optimal hand method is 0000102 considering weapon 7 as one stick of two. Although only the principal weapon for each target has been considered, note that weight constraint still allows the loading of one more of the lighter, less effective weapons (weapon 2 rather than weapon 1 since weapon 2 is dominant over the entire target spectrum). The load thus generated corresponds to the third most valuable dynamic programming load, and, if used in accordance with the dynamic programming firing policy, it would be expected to yield a return of greater than 90% of that given by the actual optimum load.

With the best loading as generated by either method, the optimal strategy can be listed using the "POLICY" program of Appendix II. The results of this determination for loading 0300002 are shown in Figure 1 along with a format for displaying the strategy compactly. The time axis is mission time remaining and entries such 2x7 denote that two weapons of type seven should be expended.

As an example, as the mission begins, the subloading is 0300002. If the first target which is met is a type one, and is encountered with



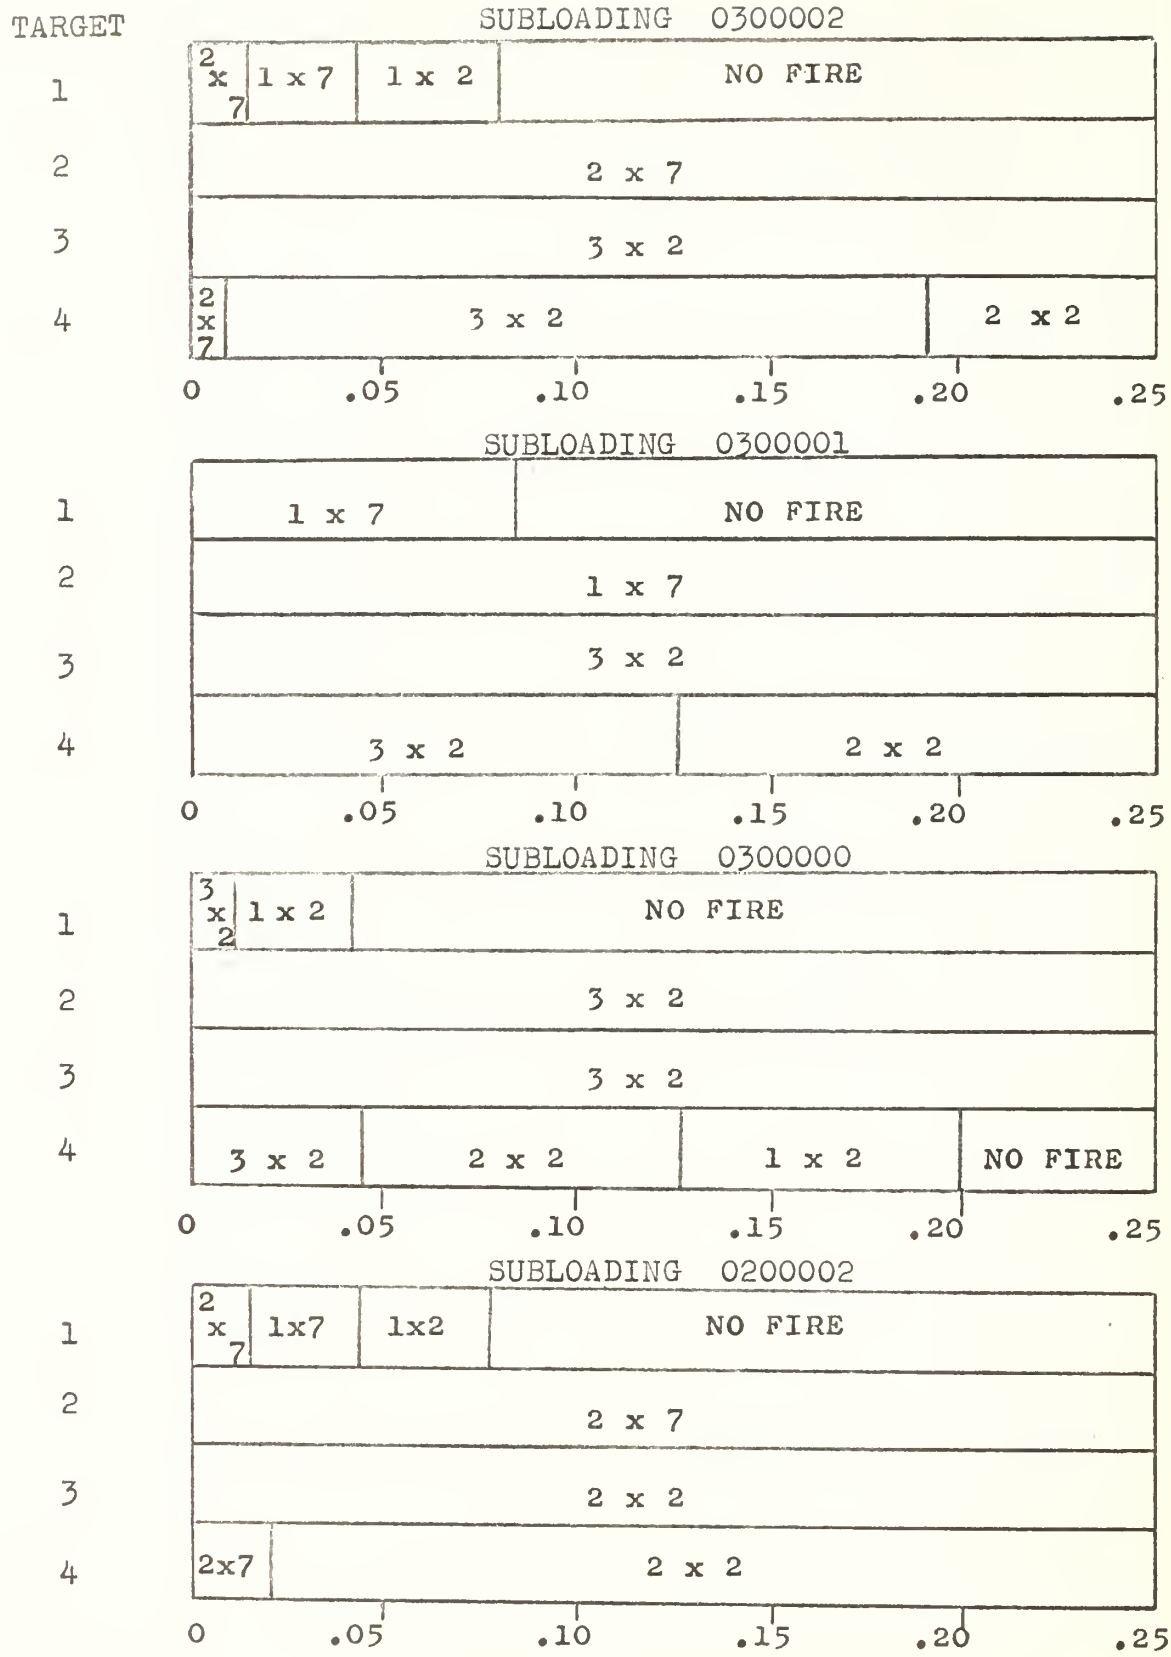


FIGURE 1
OPTIMAL STRATEGY DISPLAY


TARGET
SUBLOADING 0200001
1
1 x 7
NO FIRE
2
1 x 7
3
2 x 2
4
2 x 2
NO FIRE
0
.05
.10
.15
.20
.25
SUBLOADING 0200000
1
2 x 2
1x2
NO FIRE
2
2 x 2
3
2 x 2
4
2 x 2
1 x 2
NO FIRE
0
.05
.10
.15
.20
.25
SUBLOADING 0100002
1
2 x 7
1x7
1x2
NO FIRE
2
2 x 7
3
2 x 7
4
2x7
1 x 2
0
.05
.10
.15
.20
.25
SUBLOADING 010001
1
1 x 7
NO FIRE
2
1 x 7
3
1 x 2
4
1x7
1 x 2
0
.05
.10
.15
.20
.25

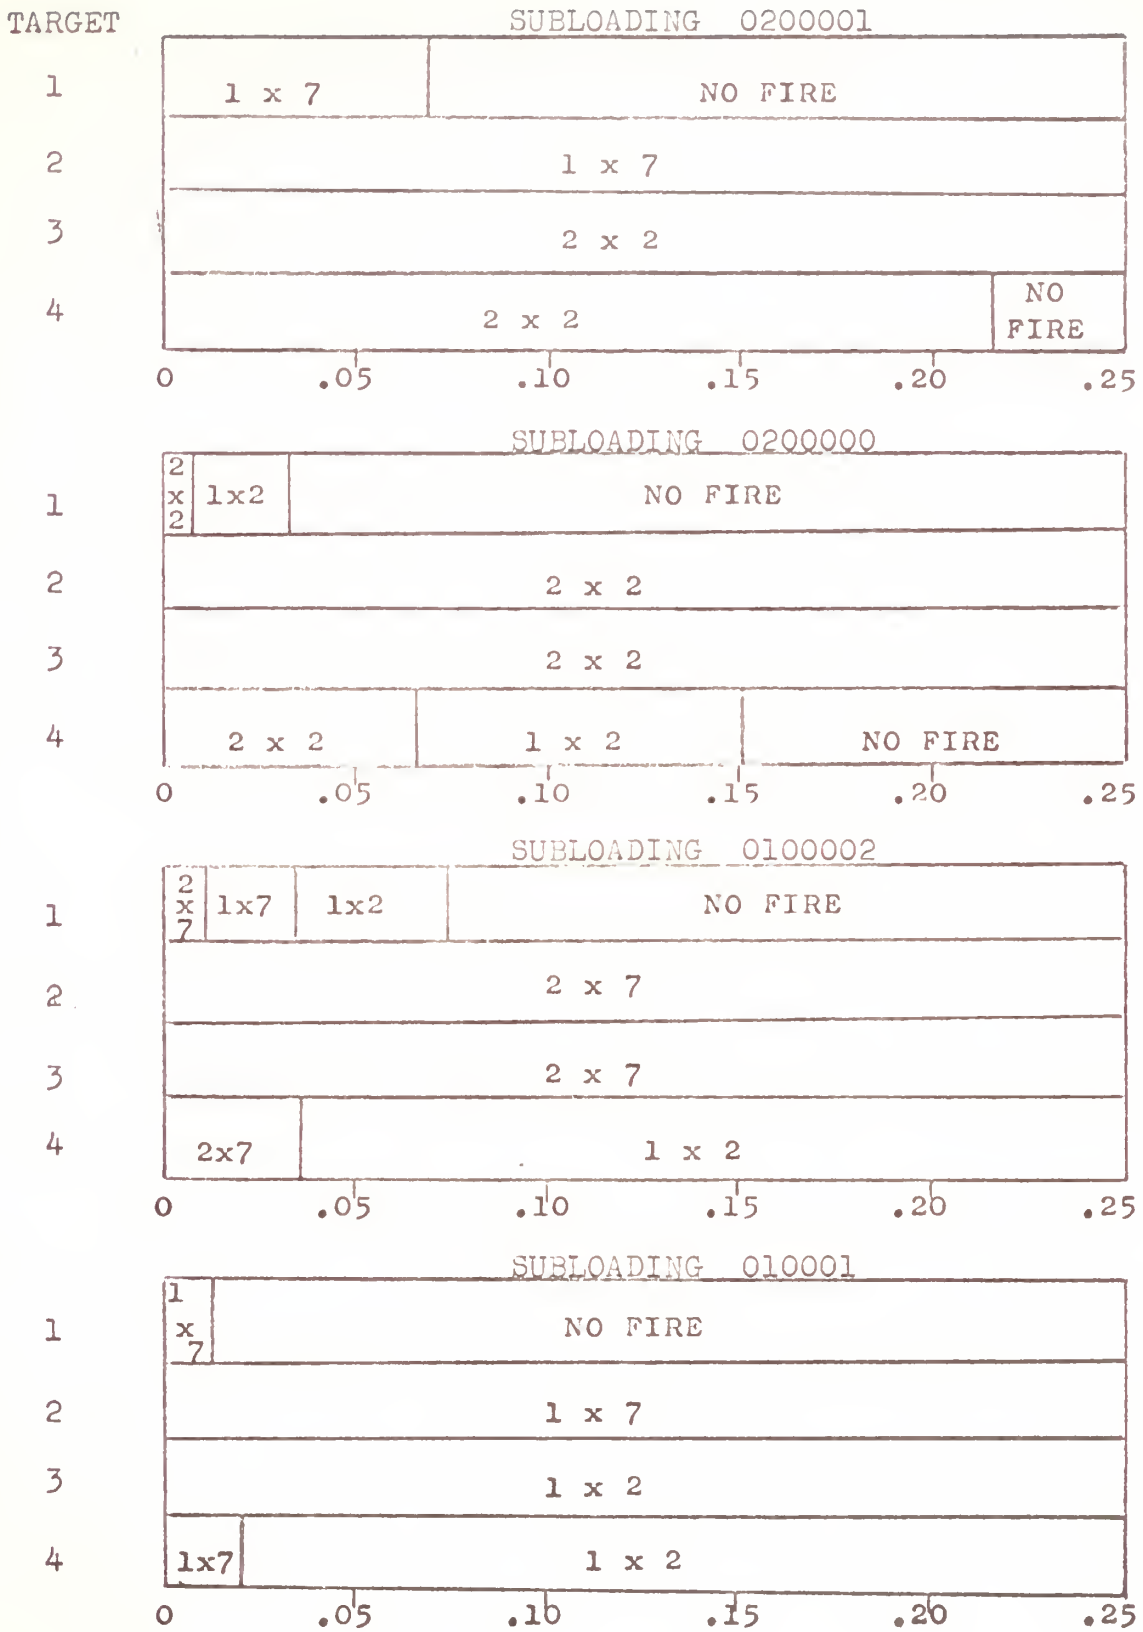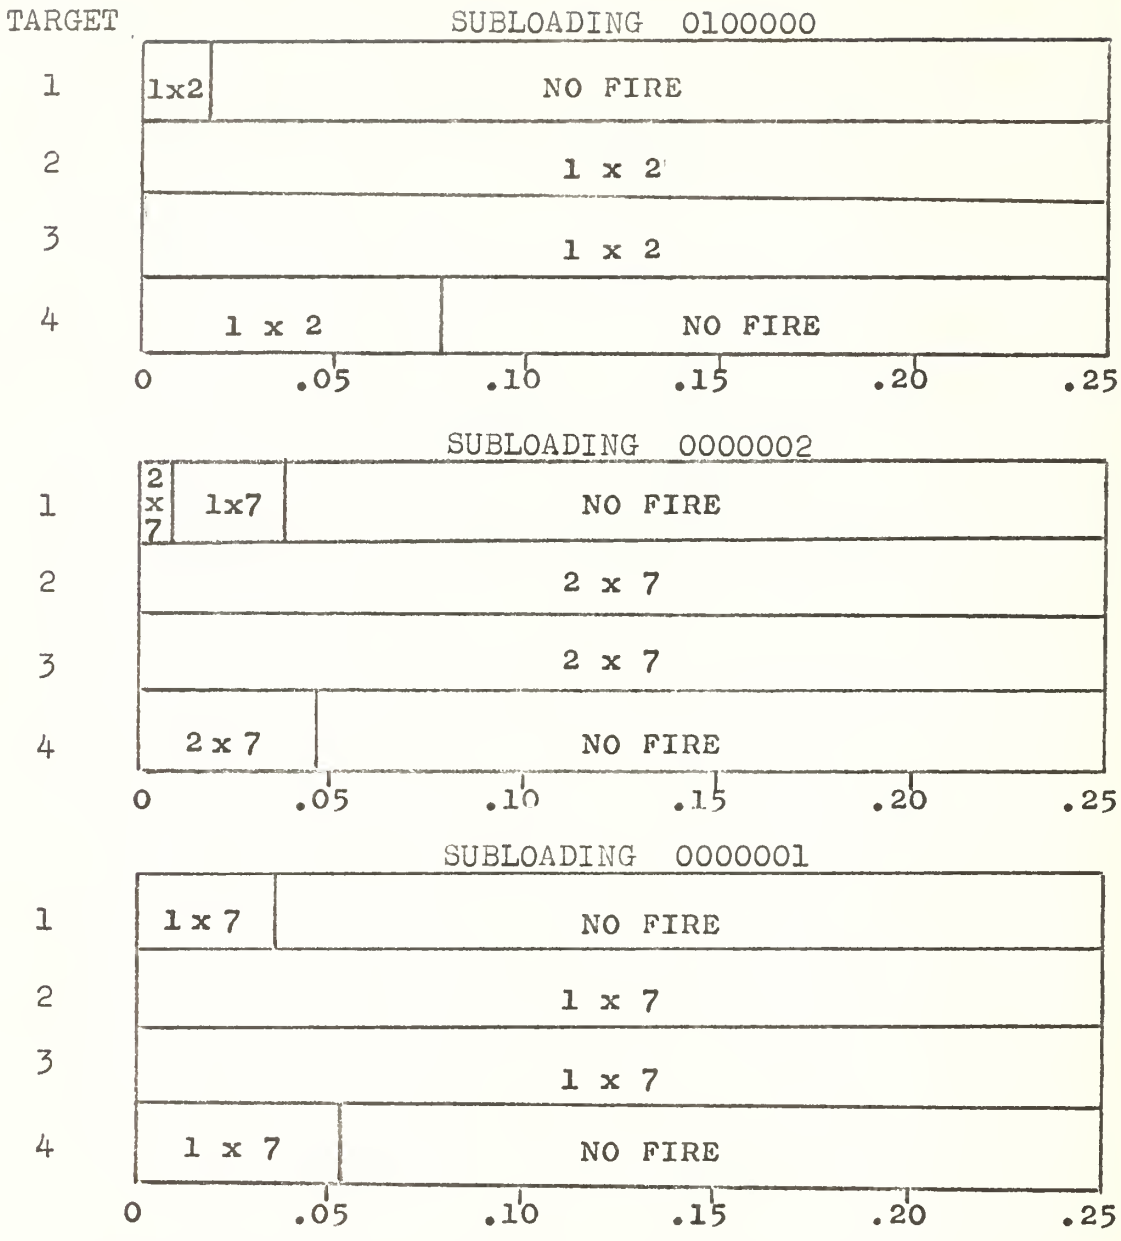

(The abscissa in these figures is the time remaining in which to search for and attack targets.)

.22 hours remaining, the optimal strategy indicates that no weapons should be fired. If the next target which is encountered is a type four at time .17, the subloading still being 0300002, a drop of three weapons of type two is called for. The sub-loading now is 0000002. If a type three target is now met, both of the remaining type seven weapons should be dropped.

It is of interest to note the changes which occur over time in the optimal weapon to drop when a target is met. With the loading 0300002 and target type one, with more than .08 hours remaining, no weapons should be expended. With .045 to .08 hours remaining, the optimal strategy calls for the expenditure of one weapon of type two. Weapon type seven however has a higher kill probability against type one targets! The type seven weapons at this point are being saved for possible future encounters with targets of type two and four, both of which are more valuable and occur frequently enough so that there is a significant probability of an encounter in the time remaining. Although weapon type two is the most potent against type three targets -the most valuable target type- the probability of meeting a type three target is rather small because of the low encounter rate of 0.10. It is for this reason that type two weapons are not being conserved. Later in the mission however, the optimal weapons to drop on a type one target are type sevens. At this point in time the probability of future encounters with more valuable targets is remote.

Since the ultimate objective is the maximization of the expected returns for the mission, a consideration might be made for lengthening the search time at the expense of lower payload and weapon station availability. That is, perhaps an additional tank of fuel can be

carried on one of the aircraft's weapon racks, thus reducing the number available on which ordnance can be carried and also reducing the weapons payload, but increasing the search time.

Table 6 lists the expected returns for the five best loads generated when the search time has been increased to 0.50 hours, the payload decreased to 4000 lbs., the number of weapon racks decreased to four, and the other input parameters unchanged from those of Table 3.

LOADING	EXPECTED RETURNS
0000002	1.78803
0000301	1.42184
0100201	1.30025
0010201	1.29748
0000400	1.28808

TABLE 6
BEST LOADS AND EXPECTED RETURNS

Since the expected value of targets killed for the longer mission is significantly better than that for the shorter, 1.78803 compared to 1.29514, it is clearly preferrable to make the trade-off of gas for weapons.

An interesting feature of the kill probability matrix of Table 3 is the preferred weapons with which to attack the most valuable targets. Weapon type seven is the most potent against type two targets while weapon type five is preferred against type three targets. Target type three, although the most valuable, has a very low encounter rate. This results in the fact that weapon type five does not appear frequently in the loadings which yield high expected returns for short missions. Letting the maximum payload equal 4000 lbs. and the number of weapons stations equal four, the preferred loadings of these two

weapons alone can be examined as a function of search time. The three loadings which must be considered are 02, 31, and 40, where now, 02 denotes a load consisting of zero weapons of type five and two weapons of type seven. Calculations show that an initial loading of 02 is optimal for mission times of less than 1.6 hours. For mission times of 1.6 to 8.9 hours, loading 31 is optimal, and finally for $T > 8.9$ hours, loading 40 is preferred.

COMPARISON OF EXPECTED RETURNS FROM NON-OPTIMAL FIRING STRATEGIES

The gains in kill potential realizable through the utilization of the optimal firing doctrine can be demonstrated by comparisons with the expected returns from other strategies. As an example, consider the following case with non-optimal strategies:

Let:

Number of weapons = 1

Operating time = 1 hour

No. of target types = 2

$v_1 = 3$

$v_2 = 4$

Strategy A: Expend the weapon on the first target which is encountered.

E_A = the expected returns from strategy A.

Strategy B: Expend weapon only if a target of type 2 is encountered. (Note that target type 2 is the more valuable).

E_B = the expected returns from strategy B.

T_i: The random variable describing the time to first encounter with target type i. (T_i is exponentially distributed with mean $1/r_i$.)

$$E_A = p_1 v_1 \text{Prob.}\ (T_1 < \min\ (t_2,\ 1 \text{ hour})) + p_2 v_2 \text{Prob.}\ (T_2 < \min\ (t_1,\ 1 \text{ hour}))$$

$$E_A = p_1 v_1 \int_0^1 r_1 e^{-r_1 t_1} \int_{t_1}^{\infty} r_2 e^{-r_2 t_2}\, dt_2\, dt_1 + p_2 v_2 \int_0^1 r_2 e^{-r_2 t_2} \int_{t_2}^{\infty} r_1 e^{-r_1 t_1}\, dt_1\, dt_2$$

$$E_B = p_2 v_2 \text{Prob.}\ (T_2 < 1 \text{ hour})$$

$$E_B = p_2 v_2 \int_0^1 r_2 e^{-r_2 t_2}\, dt_2$$

For several values of the parameters p_i and r_i, Table 7 shows the results of calculations of the expected returns using either of these strategies or the optimal.

	Expected Value of Targets Killed			% Gain Optimal Over	
	Strat. A	Strat. B	Optimal Strat.	A	B
$p_1 = .3$ $p_2 = .4$ $r_1 = 10$ $r_2 = 1$	.963	1.011	1.270	32%	26%
$p_1 = .3$ $p_2 = .4$ $r_1 = 10$ $r_2 = .25$	.916	.354	1.018	11%	185%
$p_1 = .1$ $p_2 = .4$ $r_1 = 10$ $r_2 = 1$	.414	1.011	1.064	150%	5%

TABLE 7
GAINS IN EXPECTED VALUE OF TARGETS KILLED ACHIEVED BY UTILIZING THE OPTIMAL FIRING STRATEGY

These results are representative of those obtainable using other values for the input parameters. Generally, when one of these non-optimal strategies approaches the optimal in expected returns, the other yields very poor results. When the non-optimal strategies yield roughly equivalent returns, the optimal dominates both by a significant amount; this is demonstrated in the first example of the table by gains of 26% and 32% through use of the optimal strategy.

Comparisons can be made in this way with any conceivable strategy. It seems reasonable too that techniques which consider the target values and encounter rates could yield returns comparable to those achievable through use of the optimal strategy. The determination of these strategies however would probably involve calculations no less complex than those of the dynamic program.

SENSITIVITY OF EXPECTED RETURNS TO TARGET VALUES

A complete parametric analysis is beyond the scope of this paper; however, some further comment must be made about target values. The developments of both the dynamic programming model and the hand approximation are based upon the assumption that a ratio scale of values can be assigned to all possible targets. Such a determination is completely subjective and must rely solely on the judgement of experienced planners. Quantitative target values might be determined by presenting a list of targets to several military commanders and asking them to rate these targets according to military value. Targets could be assigned numbers consistent with their importance relative to a target of least value. The results of such a large number of opinions could then be analyzed by methods of sensory psychophysics in order to assign representative

values to all targets. Methods for accomplishing such an analysis have been reviewed and consolidated by S. S. Stevens.[1]

The above method will obviously generate strategic values. These will certainly not be valid for every tactical situation (e.g., a tank about to overrun friendly troops is more important than a railroad bridge at that moment even though the bridge may have a higher strategic value). A strategic scale will, however, provide a starting point -- a base which can be adjusted to meet specific tactical situations.

An analysis of the effects on the expected returns of incorrect selections of target values can be made rather easily for the simple case of a single weapon and two target types. Assume the "true" ratio of the target values is V_r^*. Now suppose that an erroneous ratio, V_r, has been used to calculate the strategy. The expected returns which result from the utilization of this strategy - these returns being computed using the true value ratio, V_r^* - can be compared with the maximum of the expected returns, this maximum being obtained when the strategy derived using V_r^* is utilized. Define:

$$V_r = v_2/v_1$$

and let the mission time = 1 hour. With a single weapon, a strategy consists merely of a cross-over time, the time after which the least valuable target should be attacked if met. These times can be calculated from:

$$t = \frac{1}{r_1+r_2} \ln \frac{r_1p_1 + r_2p_2V_r}{r_2(p_2V_r - p_1)} \quad \text{if } V_r > 1$$

$$t = \frac{1}{r_1+r_2} \ln \frac{r_1p_1 + r_2p_2V_r}{r_1(p_1 - p_2V_r)} \quad \text{if } V_r < 1$$

$$t = \infty \quad \text{if } V_r = 1$$

[1]S.S. Stevens, "A Metric for Social Concensus," Science, vol. 151, 4 February 1966, pp. 530-541.

Using these cross-over times then, the expected returns, E, are calculated from:

$$E = p_2 V_r^* \frac{r_2}{r_1+r_2}\left(1 - e^{-(r_1+r_2)}\right) + \frac{p_1 r_1}{r_1+r_2}\left(1 - e^{-(r_1+r_2)}\right) \text{ if } t \geq 1 \text{ hour}$$

$$E = p_2 V_r^* \left(1 - e^{-r_2(1-t)} + e^{-r_2(1-t)}\left(1 - e^{-(r_1+r_2)t}\right)\frac{r_2}{r_1+r_2}\right)$$

$$+ p_1 e^{-r_2(1-t)}\left(1 - e^{-(r_1+r_2)t}\right)\frac{r_1}{r_1+r_2} \text{ if } t < 1 \text{ hour, and } V_r > 1$$

$$E = p_1\left(1 - e^{-r_1(1-t)} + e^{-r_1(1-t)}\left(1 - e^{-(r_1+r_2)t}\right)\frac{r_1}{r_1+r_2}\right)$$

$$+ p_2 V_r^* e^{-r_1(1-t)}\left(1 - e^{-(r_1+r_2)t}\right)\frac{r_2}{r_1+r_2} \text{ if } t < 1 \text{ hour, and } V_r < 1$$

Letting:

$$p_1 = p_2 = .10$$

$$r_1 = 2/\text{hour}$$

$$r_2 = 1/\text{hour}$$

Table 8 lists the results for several possible values of V_r^*.

While the scope of these investigations of value sensitivity is obviously limited, it appears that over-estimation of the value of targets of higher worth might impose less risk than under-estimation. Further examination in the area of sensitivity where several weapon types are employed simultaneously would be necessary before conclusive results could be stated.

V_r^*	If V_r^* is misestimated by a factor of z, the expected returns decrease by y.			
	z=10 y	z=5 y	z=1/2 y	z=1/10 y
1	28%	22%	5%	8%
2	8%	6%	10%	37%
3	4%	3%	5%	53%
5	2%	1%	3%	67%
7	1%	1%	1%	66%
10	1%	<.5%	1%	40%

TABLE 8
PERCENTAGE DECREASE IN EXPECTED RETURNS
DUE TO MISESTIMATION OF V_r^*

4. CONCLUSIONS AND RECOMMENDATIONS

A method for determining an optimal initial loading for missions against targets of opportunity has been developed. As a by-product of this load determination, an optimal strategy for the sequential expenditure of weapons has been found. The gains in the expected value of targets killed, when the initial loading is optimal and when an optimal strategy is employed, have been shown to be significant when compared with initial loadings and firing doctrines derived by the application of simple intuition and judgement to kill probabilities, target values, and encounter rates.

The determination of an optimal loading and expenditure policy, however, are at present of such complexity as to require the use of a high speed computer in all but the most trivial cases. For those operational situations in which a computer will not be available, a hand-calculable approximation method for the determination of a best initial loading has also been developed, which, though sub-optimal, has been found to generate loads which yield high expected returns.

Either of the above methods should yield significantly better results than present policies which prescribe that aircraft be loaded for targets which are assumed known or that several aircraft each be given different loads in order to cover an unknown spectrum of targets.

The models presented in this paper assume that weapons can be loaded in any combination which satisfies rack and weight constraints, and that the pilot has complete freedom of choice as to the sequence in which weapons can be expended. For most attack aircraft these assumptions are not always true. Restrictions on unsymmetrical loadings

are one limiting factor. Others relate to the mechanics of multiple bomb racks. The models should be expanded to account for these aspects of the problem.

A vital assumption in the developments of both models was that inter-encounter times would be distributed exponentially. It is recommended that an analysis of operational data be made to ascertain the validity of this supposition.

It seems reasonable to assume that a list of all possible types of targets of opportunity, for a spectrum of scenarios, would be small enough - certainly not larger than 50 - that a thorough analysis, as suggested in Section 3, could be made of their relative values. Such an analysis would indicate general strategic values which could then be adjusted for specific tactical scenarios. Furthermore, additional investigations similar to that outlined in Section 3 should be undertaken to study the sensitivity of the optimal load and strategy calculations to these values.

The hand approximation method is rather crude in form. It is recommended that this model be examined further in an attempt to refine the calculations and to extend the model to cover a wider variety of cases in a more complete fashion.

The computer programs of Appendix II were written solely for the computations used in this thesis and should be improved upon before extensive investigations are made of the dynamic programming treatment of the problem. The four target-seven weapon example required two hours and fifteen minutes on a CDC-1604 computer for the determination of an optimal load. This is testimony to the inefficiency of the "BESTLD" FORTRAN program.

The problem of determining an optimal initial loading is similar to the classic "flyaway-kit" problem[1] of dynamic programming. In the strike aircraft loading problem the additional complication is present that the costs of shortages are not constant but depend on the initial loading. It would seem though that research into solution of the strike aircraft problem by this method should be fruitful. Very good approximations to an optimal initial loading should be obtainable very rapidly in this way.

Although the "POLICY" FORTRAN program computes the optimal strategy with relative ease, usually less than four minutes is required on a CDC-1604 computer, it is recommended that methods of approximation be developed for which a strategy can be calculated without the aid of a high speed computer.

---

[1] Bellman, R. E. and Dreyfus, R. E., Applied Dynamic Programming, (Princeton, New Jersey: Princeton University Press, 1962), pp. 42-43.

ACKNOWLEDGEMENTS

The authors wish to express their appreciation for the assistance and encouragement given them by Professor Stephen M. Pollock of the U. S. Naval Postgraduate School and to Professor David A. Schrady whose suggestions and criticisms helped determine the form of the final write-up.

BIBLIOGRAPHY

1. Bellman, R. E. Dynamic Programming. Princeton University Press, 1957.

2. Bellman, R. E. and Dreyfus, S. E. Applied Dynamic Programming. Princeton University Press, 1962.

3. Parzen, E. Modern Probability Theory and Its Applications. John Wiley and Sons, 1960.

4. Stevens, S. S. A Metric for Social Concensus, Science, vol. 151, 4 February 1966, pp. 530-541.

5. Bram, J. Allocation of Weapons to Targets with Exponential Arrival Times in a Limited Time Interval. Operations Evaluation Group, Center for Naval Analysis. Interim Research Memorandum 32, 1963.

6. U. S. Naval Ordnance Test Station. Preferred Aircraft Loadings Based on the Predicted Combat Effectiveness of Conventional Air-to-Surface Weapons. NAVWEPS Report 8664, NOTS TP 3710, April 1965. SECRET

APPENDIX I

ENCOUNTER RATES

In a combat situation, many targets (especially "targets of opportunity") may be thought of as being distributed randomly throughout a given area, in that the pilot flying the mission does not know, beforehand, where or when a target will be encountered. This may be thought of as the classical situation in which it may be assumed that, in any small time interval dt, the probability that a target is encountered is proportional to dt and is independent of any previous encounters.

Over a period of time, photo or visual reconnaissance can give an average density of targets in a given area. From the attack aircraft speed and the average search sweep width (width of a path in which the pilot could be expected to see a target) the area swept per unit time can be obtained. By multiplying the average type i target density by the average sweep area per unit time, an estimate of the average encounter rate r_i is obtained for target type i.

The average encounter rate developed above can be used to generate the distribution of inter-encounter times.

Assumptions:

Probability of one encounter in dt = $r_i dt + h(dt)$ where h(dt) approaches zero as dt approaches zero.

Probability of two or more encounters in dt = h(dt)

Probability of no encounters in dt = $1-r_i dt + h(dt)$ p(t)dt = prob. ($t \leq$ first encounter time $\leq t + dt$) = dP(t)

$$P(t) = \int_0^t p(T)dt = \text{prob.}(\text{encounter time} \leq t)$$

$Q(t) = 1-P(t)$

Thus if t_e is the encounter time, and t is any arbitrary time in the mission,

$Q(t+dt) = \text{prob.}((t_e > t)(\text{no encounter in } dt))$

$= Q(t)\ (1-r_i dt + h(dt))$

Subtracting Q(t) from both sides, dividing through by dt and taking the limit as dt approaches zero gives $dQ(t)/dt = -Q(T)r_i$

Rearranging gives $dQ(t)/Q(t) = -r_i dt$

Integrate both sides to get $\ln Q(t) = C-r_i t$

Thus $Q(t) = Ae^{-r_i t}$

But $Q(0) = 1$ since there can certainly be no encounters in zero search time. Therefore $A = 1$ and $Q(t) = e^{-r_i t}$ and consequently $P(t) = 1-e^{-r_i t}$ and $p(t) = r_i e^{-r_i t}$

Thus it is seen that the inter-encounter times are exponentially distributed. It also follows naturally that the probability distribution on the number of targets type i encountered during a mission of length T is Poisson,[1] i.e.,

$$\text{prob.}\ (N(T) = n) = (r_i T)^n\ e^{-r_i T}/n!$$

and the expected no. $\bar{N}(T) = r_i T$ (This is obtained from the observations).

---

[1] Parzen, E., Modern Probability Theory and Its Applications, (New York: John Wiley and Sons, 1960) p. 253.

APPENDIX II

BESTLD AND POLICY FORTRAN PROGRAMS

```
      PROGRAM BESTLD                                                    000000
      DIMENSION XLAM(10),P(8,8,10),V(10),X(512),F(512),N(8),W(8),J(9),  000010
     1          ISUBS(512)                                             000020
C     MAXIMUM OF 8 TARGET TYPES, 8 WEAPON TYPES, AND 10 WEAPON RACKS    000030
      READ 551,L,LL,WM                                                  000040
  551 FORMAT (2I2,F10.0)                                                000050
C    L IS THE NUMBER OF WEAPON RACKS, LL IS THE NUMBER OF WEAPON TYPES, 000060
C     WM IS THE MAXIMUM PAYLOAD OF THE STRIKE AIRCRAFT                  000070
      READ 552,(W(I),I=1,8)                                             000080
  552 FORMAT (8F6.0)                                                    000090
C     W(I) IS THE WEIGHT OF WEAPON TYPE I, IF THE NUMBER OF WEAPON TYPES 000100
C     IS LESS THAN 8, SET W(LL+1),W(LL+2),...,W(8) EQUAL TO WM+1.       000110
      READ 200, M, DELTA, T                                             000120
  200 FORMAT (I5,2F5.0)                                                 000130
C     M IS THE NUMBER OF TARGET TYPES, DELTA IS DELTA T,                000140
C     T IS THE MISSION TIME                                             000150
      READ 202,(XLAM(I),V(I),I=1,M)                                     000160
  202 FORMAT (2F5.0)                                                    000170
C     XLAM(I) IS THE ENCOUNTER RATE WITH TARGET TYPE I,                 000180
C     V(I) IS THE VALUE OF TARGET TYPE I                                000190
      DO 825 K=1,M                                                      000200
      DO 825 JN=1,LL                                                    000210
      READ 826, (P(I,JN,K),I=1,L)                                       000220
```

```
  826 FORMAT (8F5.0)                                                    000230
C     P(I,JN,K) = THE PROBABILITY THAT I WEAPONS OF TYPE JN WILL KILL A  000240
C     TARGET OF TYPE K.                                                 000250
  825 CONTINUE                                                          000260
      PRINT 553,(W(I),I=1,8)                                            000270
  553 FORMAT(1H1,18X,1H1,6X,1H2,6X,1H3,6X,1H4,6X,1H5,6X,1H6,6X,1H7,6X,  000280
     1       1H8,/15H WEAPON WEIGHTS,8F7.0////)                         000290
      PRINT555,L,WM                                                     000300
  555 FORMAT (19H NUMBER OF RACKS IS,I2,15H MAX PAYLOAD IS,F6.0,////)   000310
      ZZ=0.0                                                            000320
      K5=0                                                              000330
      PRINT 304,M,T,DELTA                                               000340
  304 FORMAT (1X,25HNUMBER OF TARGET TYPES IS,I2,/,                     000350
     1       16H MISSION TIME IS,F5.2,6H HOURS,/,11H DELTA T IS,F5.3//) 000360
      PRINT 305                                                         000370
  305 FORMAT (12H TARGET TYPE,4X,14HENCOUNTER RATE,4X,5HVALUE)          000380
      PRINT 306,(I,XLAM(I),V(I),I=1,M)                                  000390
  306 FORMAT (I7,10X,F10.5,6X,F5.2)                                     000400
      PRINT 837,(I,I=1,L)                                               000410
  837 FORMAT (///,27X,18HKILL PROBABILITIES,/,6X,19HNUMBER OF WEAPONS =,000420
     1       4X,I1,7I6)                                                 000430
      DO 835 K=1,M                                                      000440
      DO 835 JN=1,LL                                                    000450
      PRINT 836,K,JN,(P(I,JN,K),I=1,L)                                  000460
  836 FORMAT (7H TARGET,I3,3X,6HWEAPON,I2,4X,8F6.3)                     000470
  835 CONTINUE                                                          000480
      PRINT 733                                                         000490
  733 FORMAT (1H1)                                                      000500
      DO 500 I=2,8                                                      000510
  500 A=MIN1F(W(1),W(I))                                                000520
      AMIN=WM-A+1.0                                                     000530
      DO 501 J1P = 1,9                                                  000540
```

```
      J(1)=J1P-1                                                        000550
      J2T=9-J(1)                                                        000560
      DO 501 J2P=1,J2T                                                  000570
      J(2)=J2P-1                                                        000580
      J3T=J2T-J(2)                                                      000590
      DO 501 J3P=1,J3T                                                  000600
      J(3)=J3P-1                                                        000610
      J4T=J3T-J(3)                                                      000620
      DO 501 J4P=1,J4T                                                  000630
      J(4)=J4P-1                                                        000640
      J5T=J4T-J(4)                                                      000650
      DO 501 J5P=1,J5T                                                  000660
      J(5)=J5P-1                                                        000670
      J6T=J5T-J(5)                                                      000680
      DO 501 J6P=1,J6T                                                  000690
      J(6)=J6P-1                                                        000700
      J7T=J6T-J(6)                                                      000710
      DO 501 J7P=1,J7T                                                  000720
      J(7)=J7P-1                                                        000730
      J8T=J7T-J(7)                                                      000740
      DO 501 J8P=1,J8T                                                  000750
      J(8)=J8P-1                                                        000760
      WLOAD=0.0                                                         000770
      NLOAD = 0                                                         000780
      DO 502 I=1,8                                                      000790
      NLOAD = NLOAD + J(I)                                              000800
  502 WLOAD=WLOAD+J(I)*W(I)                                             000810
      IF (NLOAD .LE. L) 823,501                                         000820
  823 IF (WLOAD .GE. AMIN) 503,506                                      000830
  506 IF (NLOAD .EQ. L) 504,501                                         000840
  503 IF(WLOAD .LE. WM) 504,501                                         000850
  504 N1P = J(1) + 1                                                    000860
```

```
      N2P = J(2) + 1                                                    000870
      N3P = J(3) + 1                                                    000880
      N4P = J(4) + 1                                                    000890
      N5P = J(5) + 1                                                    000900
      N6P = J(6) + 1                                                    000910
      N7P = J(7) + 1                                                    000920
      N8P = J(8) + 1                                                    000930
      I99 = 6                                                           000940
      IPROD = N1P * N2P * N3P * N4P * N5P * N6P * N7P * N8P             000950
      DO 101 I=1,IPROD                                                  000960
  101 X(I) = 0.0                                                        000970
      JJ=0                                                              000980
      DO 1000 NN1 = 1,N1P                                               000990
      I1 = NN1 - 1                                                      001000
      DO 1000 NN2 = 1,N2P                                               001010
      I2 = NN2 - 1                                                      001020
      DO 1000 NN3 = 1,N3P                                               001030
      I3 = NN3 -1                                                       001040
      DO 1000 NN4 = 1,N4P                                               001050
      I4 = NN4-1                                                        001060
      DO 1000 NN5 = 1,N5P                                               001070
      I5 = NN5 - 1                                                      001080
      DO 1000 NN6=1,N6P                                                 001090
      I6 = NN6 - 1                                                      001100
      DO 1000 NN7 =1,N7P                                                001110
      I7 = NN7-1                                                        001120
      DO 1000 NN8 =1,N8P                                                001130
      I8 = NN8-1                                                        001140
      JPROD =I1 * 10**7 +I2 * 10**6+ I3 * 10**5 + I4 * 10**4            001150
     1+ I5 * 10**3 + I6 * 10**2  + I7 * 10 + I8                         001160
      JJ = JJ + 1                                                       001170
 1000 ISUBS(JJ) = JPROD                                                 001180
```

```
      LOAD = ISUBS(IPROD)                                              001190
   58 SUMLAM = 0.0                                                     001200
      DO 100 I=1,M                                                     001210
  100 SUMLAM=SUMLAM+ XLAM(I)                                           001220
      TEMP = 1.0 - DELTA* SUMLAM                                       001230
      XNDIV =T/DELTA                                                   001240
      NDIV = XNDIV + 1                                                 001250
      DO 102 I1=2,NDIV                                                 001260
      TIME =(I1-1)*DELTA                                               001270
C     THIS IS THE TIME REMAINING IN WHICH TO OPERATE                   001280
  721 DO 103 I2 = 2,IPROD                                              001290
      ILOAD =ISUBS(I2)                                                 001300
      ITEM = ILOAD                                                     001310
      DO 625 IY =1,8                                                   001320
      N(IY) = ITEM/10**(8-IY)                                          001330
  625 ITEM = ITEM - N(IY) * 10**(8-IY)                                 001340
      TERM1= TEMP *X(I2)                                               001350
      TERM2=0.0                                                        001360
      DO 104 I3=1,M                                                    001370
      Y=0.0                                                            001380
      DO 105 I4=1,8                                                    001390
      A=0.0                                                            001400
      NL = N(I4) + 1                                                   001410
      IF (NL-1) 105,105,107                                            001420
  107 DO 106 I5=1,NL                                                   001430
      JI4 =I5-1                                                        001440
C     JI4 IS THE NUMBER OF WEAPONS OF TYPE I4 EXPENDED                 001450
      IF(JI4) 640,640,641                                              001460
  640 FIRST = 0.0                                                      001470
      GO TO 642                                                        001480
  641 FIRST = P(JI4,I4,I3) * V(I3)                                     001490
  642 JSUBS = ILOAD - JI4*10 **(8-I4)                                  001500
```

```
      DO 108 I6 = 1,IPROD                                                001510
      IF (JSUBS - ISUBS(I6)) 108,109,108                                 001520
  109 I7 = I6                                                            001530
      GO TO 110                                                          001540
  108 CONTINUE                                                           001550
  110 SECOND=X(I7)                                                       001560
      Z=FIRST + SECOND                                                   001570
      IF (Z-A)106,111,111                                                001580
  111 A = Z                                                              001590
  106 CONTINUE                                                           001600
      IF (A-Y) 105,112,112                                               001610
  112 Y = A                                                              001620
  105 CONTINUE                                                           001630
  104 TERM2 = TERM2 + Y * XLAM(I3)*DELTA                                 001640
      F(I2)=TERM1 + TERM2                                                001650
  103 CONTINUE                                                           001660
      IF (I99 - I1) 129,129,128                                          001670
  129 I99 = I99 + 5                                                      001680
      PRINT 320,(N(IY),IY=1,8),TIME,F(IPROD)                             001690
  320 FORMAT (1X,1HF,8I1,1H(,F5.3,3H) =,F10.5)                           001700
  128 DO 113 IT=2,IPROD                                                  001710
  113 X(IT) = F(IT)                                                      001720
  102 CONTINUE                                                           001730
      PRINT 888                                                          001740
  888 FORMAT (////)                                                      001750
      IF (F(IPROD) - ZZ) 501,501,141                                     001760
  141 ZZ = F(IPROD)                                                      001770
      K5 = 10*LOAD + 10**10                                              001780
  501 CONTINUE                                                           001790
      PRINT 666,K5,ZZ                                                    001800
  666 FORMAT(1H1,14H BEST LOAD IS ,I9,28H  WITH AN EXPECTED RETURN OF,   001810
     1       F9.5)                                                       001820
      END                                                                001830
```

```
F00000120( .050) =    .34921
F00000120( .100) =    .56935
F00000120( .150) =    .76357
F00000120( .200) =    .94750
F00000120( .250) =   1.12276
```

```
F00000310( .050) =    .24291
F00000310( .100) =    .37144
F00000310( .150) =    .47282
F00000310( .200) =    .57092
F00000310( .250) =    .66664
```


BESTLD SAMPLE OUTPUT

TABLE 9

```
      PROGRAM POLICY                                                    000000
      DIMENSION XLAM(10),P(8,8,10),V(10),X(512),F(512),N(8),            000010
     1     ISUBS(512),KFIRE(9,10),JFIRE(9),LFIRE(9)                   000020
      READ 200,M,N1,N2,N3,N4,N5,N6,N7,N8,DELTA,T                        000030
  200 FORMAT( 9I3,2F5.0)                                                000040
C     M IS THE NUMBER OF TARGET TYPES                                   000050
C     N1 IS THE NUMBER OF WEAPONS OF TYPE 1, ETC.                       000060
C     IF THERE ARE LESS THAN 8 WEAPON TYPES,SET N8 = 0,ETC.             000070
C     DELTA IS DELTA T, T IS THE MISSION LENGTH.                        000080
      READ 202,(XLAM(I),V(I),I=1,M)                                     000090
  202 FORMAT (2F5.0)                                                    000100
C     XLAM(I) IS THE ENCOUNTER RATE WITH TYPE I TARGETS,                000110
C     V(I) IS THE VALUE OF TARGET TYPE I.                               000120
      READ 777,L,LL                                                     000130
  777 FORMAT (2I2)                                                      000140
C    L IS THE NUMBER OF WEAPON RACKS, LL IS THE NUMBER OF WEAPON TYPES  000150
      DO 825 K=1,M                                                      000160
      DO 825 JN=1,LL                                                    000170
      READ 826, (P(I,JN,K),I=1,L)                                       000180
  826 FORMAT (8F5.0)                                                    000190
C     P(I,JN,K) = THE PROBABILITY THAT I WEAPONS OF TYPE JN WILL KILL A  000200
C     TARGET OF TYPE K.                                                 000210
  825 CONTINUE                                                          000220
      N1P=N1+1                                                          000230
      N2P=N2+1                                                          000240
      N3P=N3+1                                                          000250
      N4P=N4+1                                                          000260
      N5P=N5+1                                                          000270
      N6P=N6+1                                                          000280
      N7P=N7+1                                                          000290
      N8P=N8+1                                                          000300
      IPROD = N1P * N2P * N3P * N4P * N5P * N6P * N7P * N8P             000310
```

```
      DO 101 I=1,IPROD                                                    000320
  101 X(I) = 0.0                                                          000330
      JJ=0                                                                000340
      DO 1000 NN1 = 1,N1P                                                 000350
      I1 = NN1 - 1                                                        000360
      DO 1000 NN2 = 1,N2P                                                 000370
      I2 = NN2 - 1                                                        000380
      DO 1000 NN3 = 1,N3P                                                 000390
      I3 = NN3 -1                                                         000400
      DO 1000 NN4 = 1,N4P                                                 000410
      I4 = NN4-1                                                          000420
      DO 1000 NN5 = 1,N5P                                                 000430
      I5 = NN5 - 1                                                        000440
      DO 1000 NN6=1,N6P                                                   000450
      I6 = NN6 - 1                                                        000460
      DO 1000 NN7 =1,N7P                                                  000470
      I7 = NN7-1                                                          000480
      DO 1000 NN8 =1,N8P                                                  000490
      I8 = NN8-1                                                          000500
      JPROD =I1 * 10**7 +I2 * 10**6+ I3 * 10**5 + I4 * 10**4              000510
     1+ I5 * 10**3 + I6 * 10**2  + I7 * 10 + I8                           000520
      JJ = JJ + 1                                                         000530
 1000 ISUBS(JJ) = JPROD                                                   000540
      LOAD = ISUBS(IPROD)                                                 000550
      PRINT  304, M,LOAD,T,DELTA                                          000560
  304 FORMAT(1H1,25HNUMBER OF TARGET TYPES IS,I2,/,20H INITIAL LOADING    000570
     1IS,I9,/,16H MISSION TIME IS,F5.2,6H HOURS,/,11H DELTA T IS,F5.3//)  000580
      PRINT 305                                                           000590
  305 FORMAT (12H TARGET TYPE,4X,14HENCOUNTER RATE,4X,5HVALUE)            000600
      PRINT 306,(I,XLAM(I),V(I),I=1,M)                                    000610
  306 FORMAT (I7,10X,F10.5,6X,F5.2)                                       000620
      PRINT 837                                                           000630
```

```
  837 FORMAT (1H1,40X,17HNUMBER OF WEAPONS)                                  000640
      DO 835 K=1,M                                                          000650
      DO 835 JN=1,LL                                                        000660
      PRINT 836,K,JN,(P(I,JN,K),I=1,L)                                      000670
  836 FORMAT (12H TARGET TYPE,I3,3X,12HWEAPONS TYPE,I2,6X,8F8.4)            000680
  835 CONTINUE                                                              000690
      SUMLAM=0.0                                                            000700
      DO 100 I=1,M                                                          000710
  100 SUMLAM=SUMLAM+ XLAM(I)                                                000720
      TEMP = 1.0 - DELTA* SUMLAM                                            000730
      XNDIV =T/DELTA                                                        000740
      NDIV = XNDIV + 1.0                                                    000750
      DO 102 I1=2,NDIV                                                      000760
      TIME =(I1-1)*DELTA                                                    000770
C     THIS IS THE TIME REMAINING IN WHICH TO OPERATE                        000780
      PRINT 301,TIME                                                        000790
  301 FORMAT (//,17H TIME REMAINING =,F6.3)                                 000800
      DO 103 I2=2,IPROD                                                     000810
      ILOAD =ISUBS(I2)                                                      000820
      ITEM = ILOAD                                                          000830
      DO 625 I=1,8                                                          000840
      N(I) = ITEM/10**(8-I)                                                 000850
  625 ITEM = ITEM - N(I)*10**(8-I)                                          000860
      TERM1= TEMP *X(I2)                                                    000870
      TERM2=0.0                                                             000880
      DO 104 I3=1,M                                                         000890
      Y=0.0                                                                 000900
      DO 105 I4=1,8                                                         000910
      KFIRE(I4,I3)=0                                                        000920
C     KFIRE(I,K) INDICATES THE NUMBER OF WEAPONS OF TYPE I THAT SHOULD      000930
C     BE EXPENDED IF A TARGET TYPE K IS ENCOUNTERED                         000940
      A=0.0                                                                 000950
```

```
      NL = N(I4) + 1                                                    000960
      IF (NL-1) 105,105,107                                             000970
  107 DO 106 I5=1,NL                                                    000980
      JI4 =I5-1                                                         000990
C     JI4 IS THE NUMBER OF WEAPONS OF TYPE I4 EXPENDED                  001000
      IF(JI4) 640,640,641                                               001010
  640 FIRST = 0.0                                                       001020
      GO TO 642                                                         001030
  641 FIRST = P(JI4,I4,I3) * V(I3)                                      001040
  642 JSUBS = ILOAD - JI4*10 **(8-I4)                                   001050
      DO 108 I6 = 1,IPROD                                               001060
      IF (JSUBS - ISUBS(I6)) 108,109,108                                001070
  109 I7 = I6                                                           001080
      GO TO 110                                                         001090
  108 CONTINUE                                                          001100
  110 SECOND=X(I7)                                                      001110
      Z=FIRST + SECOND                                                  001120
      IF (Z-A)106,111,111                                               001130
  111 A = Z                                                             001140
      KFIRE (I4,I3) = JI4                                               001150
  106 CONTINUE                                                          001160
      IF (A-Y) 105,112,112                                              001170
  112 Y = A                                                             001180
      JFIRE(I3) = KFIRE(I4,I3)                                          001190
      LFIRE(I3)=I4                                                      001200
  105 CONTINUE                                                          001210
  104 TERM2 = TERM2 + Y * XLAM(I3)*DELTA                                001220
      F(I2)=TERM1 + TERM2                                               001230
      PRINT 302,(N(I),I=1,8)                                            001240
  302 FORMAT (15H SUBLOADING IS ,8I1)                                   001250
      PRINT 303, (I,JFIRE(I),LFIRE(I),I=1,M)                            001260
  303 FORMAT (15H IF TARGET TYPE,I2,20H IS ENCOUNTERED FIRE,I2,         001270
```

```
   1       8H OF TYPE,I2)                                                    001280
103 CONTINUE                                                                001290
    PRINT 320,(N(IY),IY=1,8),TIME,F(IPROD)                                  001300
320 FORMAT (//,1X,1HF,8I1,1H(,F5.3,3H) =,F10.5,//////)                      001310
    DO 113 I=2,IPROD                                                        001320
113 X(I)=F(I)                                                               001330
102 CONTINUE                                                                001340
    END                                                                     001350
```

```
TIME REMAINING =    .212
SUBLOADING IS 00000010
IF TARGET TYPE 1 IS ENCOUNTERED FIRE 0 OF TYPE 7
IF TARGET TYPE 2 IS ENCOUNTERED FIRE 1 OF TYPE 7
IF TARGET TYPE 3 IS ENCOUNTERED FIRE 1 OF TYPE 7
IF TARGET TYPE 4 IS ENCOUNTERED FIRE 0 OF TYPE 7
SUBLOADING IS 00000020
IF TARGET TYPE 1 IS ENCOUNTERED FIRE 0 OF TYPE 7
IF TARGET TYPE 2 IS ENCOUNTERED FIRE 2 OF TYPE 7
IF TARGET TYPE 3 IS ENCOUNTERED FIRE 2 OF TYPE 7
IF TARGET TYPE 4 IS ENCOUNTERED FIRE 0 OF TYPE 7
```

POLICY SAMPLE OUTPUT

TABLE 10

APPENDIX III

TABULATED VALUES OF f_{ijs}

BJS	RT = .05	.10	.15	.20	.25
1	.04877	.09516	.13929	.18127	.22120
2	.04998	.09984	.14948	.19879	.24770
3	.05000	.10000	.14998	.19994	.24986
4	.05000	.10000	.15000	.20000	.24999
5	.05000	.10000	.15000	.20000	.25000
6	.05000	.10000	.15000	.20000	.25000
7	.05000	.10000	.15000	.20000	.25000
8	.05000	.10000	.15000	.20000	.25000
9	.05000	.10000	.15000	.20000	.25000
10	.05000	.10000	.15000	.20000	.25000
11	.05000	.10000	.15000	.20000	.25000
12	.05000	.10000	.15000	.20000	.25000
13	.05000	.10000	.15000	.20000	.25000
14	.05000	.10000	.15000	.20000	.25000
15	.05000	.10000	.15000	.20000	.25000
16	.05000	.10000	.15000	.20000	.25000
17	.05000	.10000	.15000	.20000	.25000
18	.05000	.10000	.15000	.20000	.25000
19	.05000	.10000	.15000	.20000	.25000
20	.05000	.10000	.15000	.20000	.25000

BJS	RT = .30	.35	.40	.45	.50
1	.25918	.29531	.32968	.36237	.39347
2	.29612	.34398	.39123	.43781	.48367
3	.29972	.34949	.39916	.44869	.49806
4	.29998	.34997	.39993	.44989	.49981
5	.30000	.35000	.40000	.44999	.49998
6	.30000	.35000	.40000	.45000	.50000
7	.30000	.35000	.40000	.45000	.50000
8	.30000	.35000	.40000	.45000	.50000
9	.30000	.35000	.40000	.45000	.50000
10	.30000	.35000	.40000	.45000	.50000
11	.30000	.35000	.40000	.45000	.50000
12	.30000	.35000	.40000	.45000	.50000
13	.30000	.35000	.40000	.45000	.50000
14	.30000	.35000	.40000	.45000	.50000
15	.30000	.35000	.40000	.45000	.50000
16	.30000	.35000	.40000	.45000	.50000
17	.30000	.35000	.40000	.45000	.50000
18	.30000	.35000	.40000	.45000	.50000
19	.30000	.35000	.40000	.45000	.50000
20	.30000	.35000	.40000	.45000	.50000

TABLE 11
VALUES OF f_{ijs}

BJS	RT = .55	.60	.65	.70	.75
1	.42305	.45119	.47795	.50341	.52763
2	.52878	.57309	.61658	.65922	.70099
3	.54724	.59621	.64492	.69336	.74150
4	.54971	.59956	.64937	.69911	.74879
5	.54997	.59996	.64993	.69990	.74985
6	.55000	.60000	.64999	.69999	.74998
7	.55000	.60000	.65000	.70000	.75000
8	.55000	.60000	.65000	.70000	.75000
9	.55000	.60000	.65000	.70000	.75000
10	.55000	.60000	.65000	.70000	.75000
11	.55000	.60000	.65000	.70000	.75000
12	.55000	.60000	.65000	.70000	.75000
13	.55000	.60000	.65000	.70000	.75000
14	.55000	.60000	.65000	.70000	.75000
15	.55000	.60000	.65000	.70000	.75000
16	.55000	.60000	.65000	.70000	.75000
17	.55000	.60000	.65000	.70000	.75000
18	.55000	.60000	.65000	.70000	.75000
19	.55000	.60000	.65000	.70000	.75000
20	.55000	.60000	.65000	.70000	.75000

BJS	RT = .80	.85	.90	.95
1	.55067	.57259	.59343	.61326
2	.74188	.78187	.82095	.85911
3	.78930	.83675	.88380	.93045
4	.79838	.84788	.89726	.94653
5	.79979	.84971	.89961	.94948
6	.79998	.84997	.89995	.94993
7	.80000	.85000	.89999	.94999
8	.80000	.85000	.90000	.95000
9	.80000	.85000	.90000	.95000
10	.80000	.85000	.90000	.95000
11	.80000	.85000	.90000	.95000
12	.80000	.85000	.90000	.95000
13	.80000	.85000	.90000	.95000
14	.80000	.85000	.90000	.95000
15	.80000	.85000	.90000	.95000
16	.80000	.85000	.90000	.95000
17	.80000	.85000	.90000	.95000
18	.80000	.85000	.90000	.95000
19	.80000	.85000	.90000	.95000
20	.80000	.85000	.90000	.95000

BJS	RT = 1	2	3	4	5
1	.63212	.86466	.95021	.98168	.99326
2	.89636	1.45866	1.75106	1.89011	1.95283
3	.97666	1.78198	2.32787	2.65200	2.82818
4	.99565	1.92486	2.68064	3.21853	3.56316
5	.99931	1.97751	2.86538	3.58970	4.12266
6	.99991	1.99408	2.94930	3.80457	4.50670
7	.99999	1.99861	2.98281	3.91524	4.74452
8	1.00000	1.99971	2.99471	3.96637	4.87789
9	1.00000	1.99994	2.99851	3.98774	4.94598
10	1.00000	1.99999	2.99962	3.99587	4.97781
11	1.00000	2.00000	2.99991	3.99871	4.99151
12	1.00000	2.00000	2.99998	3.99962	4.99696
13	1.00000	2.00000	3.00000	3.99990	4.99898
14	1.00000	2.00000	3.00000	3.99997	4.99968
15	1.00000	2.00000	3.00000	3.99999	4.99990
16	1.00000	2.00000	3.00000	4.00000	4.99997
17	1.00000	2.00000	3.00000	4.00000	4.99999
18	1.00000	2.00000	3.00000	4.00000	5.00000
19	1.00000	2.00000	3.00000	4.00000	5.00000
20	1.00000	2.00000	3.00000	4.00000	5.00000

BJS	RT = 6	7	8	9	10
1	.99752	.99909	.99966	.99988	.99995
2	1.98017	1.99179	1.99665	1.99864	1.99946
3	2.91820	2.96216	2.98289	2.99241	2.99669
4	3.76700	3.88039	3.94051	3.97118	3.98635
5	4.48194	4.70740	4.84088	4.91622	4.95710
6	5.03626	5.40669	5.64964	5.80053	5.89001
7	5.42996	5.95698	6.33627	6.59375	6.75987
8	5.68598	6.35827	6.88331	7.26985	7.53965
9	5.83874	6.62918	7.29076	7.81420	8.20683
10	5.92267	6.79868	7.57414	8.22679	8.74890
11	5.96529	6.89720	7.75825	8.52080	9.16586
12	5.98538	6.95055	7.87017	8.71779	9.46908
13	5.99421	6.97755	7.93397	8.84202	9.67753
14	5.99783	6.99036	7.96815	8.91587	9.81306
15	5.99923	6.99608	7.98541	8.95734	9.89652
16	5.99974	6.99848	7.99364	8.97937	9.94526
17	5.99992	6.99944	7.99736	8.99048	9.97230
18	5.99998	6.99980	7.99895	8.99580	9.98658
19	5.99999	6.99993	7.99960	8.99823	9.99377
20	6.00000	6.99998	7.99986	8.99928	9.99722

BJS	RT = 11	12	13	14	15
1	.99998	.99999	1.00000	1.00000	1.00000
2	1.99978	1.99991	1.99997	1.99999	1.99999
3	2.99857	2.99939	2.99974	2.99989	2.99996
4	3.99366	3.99710	3.99869	3.99942	3.99974
5	4.97855	4.98950	4.99495	4.99761	4.99889
6	5.94103	5.96916	5.98422	5.99208	5.99610
7	6.86242	6.92334	6.95833	6.97785	6.98846
8	7.71923	7.83383	7.90430	7.94623	7.97046
9	8.48724	8.67880	8.80455	8.88418	8.93301
10	9.14673	9.43641	9.63873	9.77478	9.86316
11	9.68684	10.08918	10.38705	10.59910	10.74470
12	10.10757	10.62759	11.03389	11.33906	11.55994
13	10.41868	11.05162	11.57078	11.98060	12.29233
14	10.63759	11.37008	11.99774	12.51615	12.92912
15	10.78354	11.59806	12.32261	12.94572	13.46346
16	10.87615	11.75364	12.55900	13.27636	13.89537
17	10.93207	11.85493	12.72351	13.52044	14.23125
18	10.96426	11.91790	12.83304	13.69324	14.48239
19	10.98195	11.95532	12.90287	13.81059	14.66292
20	10.99124	11.97660	12.94554	13.88710	14.78770

BJS	RT = 16	17	18	19	20
1	1.00000	1.00000	1.00000	1.00000	1.00000
2	2.00000	2.00000	2.00000	2.00000	2.00000
3	2.99998	2.99999	3.00000	3.00000	3.00000
4	3.99989	3.99995	3.99998	3.99999	4.00000
5	4.99949	4.99977	4.99990	4.99995	4.99998
6	5.99810	5.99909	5.99957	5.99980	5.99991
7	6.99410	6.99703	6.99853	6.99928	6.99965
8	7.98410	7.99160	7.99563	7.99777	7.99887
9	8.96211	8.97900	8.98858	8.99389	8.99679
10	9.91881	9.95288	9.97320	9.98504	9.99179
11	10.84142	10.90375	10.94283	10.96672	10.98098
12	11.71442	11.81908	11.88794	11.93204	11.95959
13	12.52130	12.68406	12.79627	12.87148	12.92058
14	13.24679	13.48319	13.65368	13.77308	13.85445
15	13.87926	14.20235	14.44560	14.62333	14.74959
16	14.41252	14.83090	15.15895	15.40854	15.59308
17	14.84656	15.36316	15.78390	16.11651	16.37200
18	15.18721	15.79914	16.31525	16.73814	17.07497
19	15.44486	16.14418	16.75300	17.26866	17.69355
20	15.63262	16.40786	17.10209	17.70805	18.22329

INITIAL DISTRIBUTION LIST

		No. Copies
1.	Defense Documentation Center Cameron Station Alexandria, Virginia 22314	20
2.	Library U. S. Naval Postgraduate School Monterey, California	2
3.	Chief of Naval Operations Office of Naval Warfare Analysis (OP-91) Department of the Navy Washington, D. C.	1
4.	Captain J. Cummings Office of Program Appraisal Department of the Navy Washington, D. C.	1
5.	J. Bram Operations Evaluation Group Office of the Chief of Naval Operations Washington, D. C.	1
6.	Carl L. Schaniel Naval Ordnance Test Station China Lake, California	1
7.	Prof. Stephen M. Pollock Department of Operations Analysis U. S. Naval Postgraduate School Monterey, California	2
8.	Prof. David Schrady Department of Operations Analysis U. S. Naval Postgraduate School Monterey, California	1
9.	Prof. Roger Schroeder Department of Operations Analysis U. S. Naval Postgraduate School Monterey, California	1
10.	LT Thomas M. Burns 62 Work Avenue Del Rey Oaks, California	1
11.	LT John N. Donis 230 Grove Acres, Apt. 332 Pacific Grove, California	1

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY *(Corporate author)*

U. S. NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIFORNIA

2a REPORT SECURITY CLASSIFICATION
UNCLASSIFIED

2b GROUP

3 REPORT TITLE

OPTIMUM AIRCRAFT WEAPONS SELECTION AND SEQUENTIAL FIRING STRATEGY FOR TARGETS OF OPPORTUNITY

4. DESCRIPTIVE NOTES *(Type of report and inclusive dates)*
Master's Thesis

5 AUTHOR(S) *(Last name, first name, initial)*

Donis, John N. and Burns, Thomas M.

6. REPORT DATE	7a TOTAL NO OF PAGES	7b NO OF REFS
May 1966	67	6

8a CONTRACT OR GRANT NO	9a ORIGINATOR'S REPORT NUMBER(S)
b. PROJECT NO	
c.	9b OTHER REPORT NO(S) *(Any other numbers that may be assigned this report)*
d.	

10 AVAILABILITY/LIMITATION NOTICES

Qualified requesters may obtain copies of this report from DDC.

11. SUPPLEMENTARY NOTES	12 SPONSORING MILITARY ACTIVITY
	U. S. Naval Postgraduate School, Monterey, California

13 ABSTRACT

A pilot engaged in a strike mission against targets of opportunity is continually confronted with the decision as to how many and which of his available weapons should be expended against a variety of targets which are encountered. Associated with this decision problem is the problem of determining an optimal load for such a mission subject to the constraints of available payload and number of weapons stations on the aircraft. Certain assumptions are made concerning the distribution of targets within the target area which lead to a dynamic programming formulation of the decision problem. This yields a system of ordinary differential equations which are solvable recursively. In addition to the dynamic programming model, a sub-optimum determination of a "best load" is discussed. Although not as complete or precise as the dynamic programming method, this formulation [illegible] adaptable to squadron level decision making.

DD FORM 1 JAN 64 1473

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Loading						
Weapons						
Selection						
Allocation						
Firing						
Strategy						
Targets						
Sequential						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization *(corporate author)* issuing the report.

2*a*. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2*b*. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional msrkings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all cspital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without clsssification, show title classification in all cspitsls in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the dste of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7*a*. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7*b*. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8*a*. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8*b*, 8*c*, & 8*d*. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9*a*. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9*b*. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers *(either by the originator or by the sponsor)*, also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other thsn those imposed by security classification, using atandard statements such as:

(1) "Quslified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."

(4) "U. S. militsry agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."

(5) "All distribution of thia report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring *(paying for)* the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If sdditional space is required, a continuation sheet ahall be attsched.

It is highly desirable that the abstract of claaaified reports be unclassified. Each paragrsph of the abstract shall end with an indication of the military security clasaification of the information in the psragraph, represented as *(TS)*, *(S)*, *(C)*, *or (U)*.

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used aa index entries for cstaloging the report. Key words must be selected so thst no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic locstion, may be used as key words but will be followed by an indication of technical context. The assignment of links, rales, and weights is optional.

thesD6445
DUDLEY KNOX LIBRARY
3 2768 00422048 3
DUDLEY KNOX LIBRARY